



REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

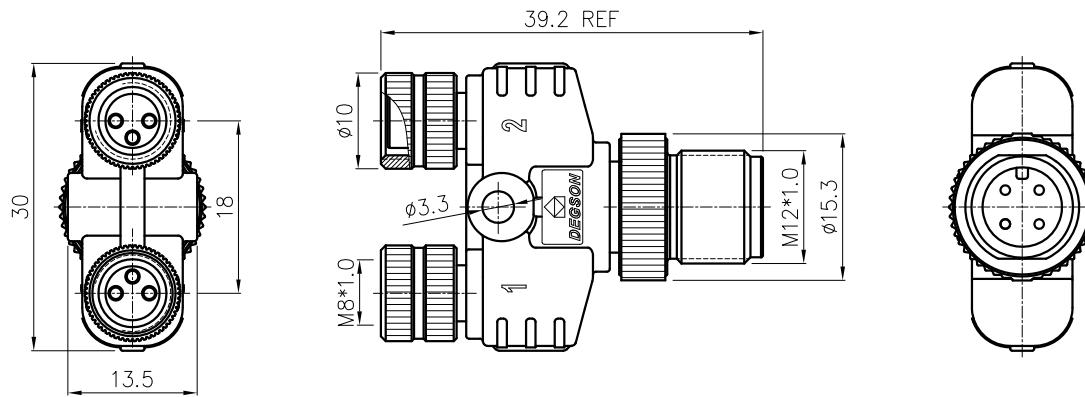

Circuit diagram:




NOTES:

- 1.RoHS Compliance,
- 2.The Code direction is shown as diagram,
- 3.Housing material: PU,(Color: black),
- 4.Contact body material: PU(Color: black)
- 5.Contact material: Copper alloy,(plating: gold)
- 6.O Ring material: Silicone,(Color: black)
- 7.M12-Screw material: Zinc alloy (plating: Ni),
- 8.M8-Screw material: Copper alloy (plating: Ni),


Technique parameter

Rated voltage	60V
Rated current	3A
Insulation resistance	≥100MΩ
Withstanding voltage	500V AC
Operating temperature	-25°C~+85°C
Levels of protection	IP67
Cable OD	/

Female(Front view)



Male(Front view)



Dimensional tolerance (mm)

≤30	30 ~ 60	60 ~ 100	100 ~ 150	>150
±0.20	±0.30	±0.50	±0.70	±1.00

PART NO.: FYM12A04MM8A03FT0100
APPD:
CHKD:
DRFT: WYM 2019/05/23
THIRD ANGLE PROJECTION

NAME: FY-M12A-04M-M8A-03F-T-0100			
TITLE: ASSEMBLY DRAWING	REV	TO-1	
DRAWING NO.: 20000428	SHEET	1/1	
DO NOT SCALE DRAWING	SCALE	1:1	