




REVISION RECORD			
REV	ECN	DESCRIPTION	DRAFT DATE

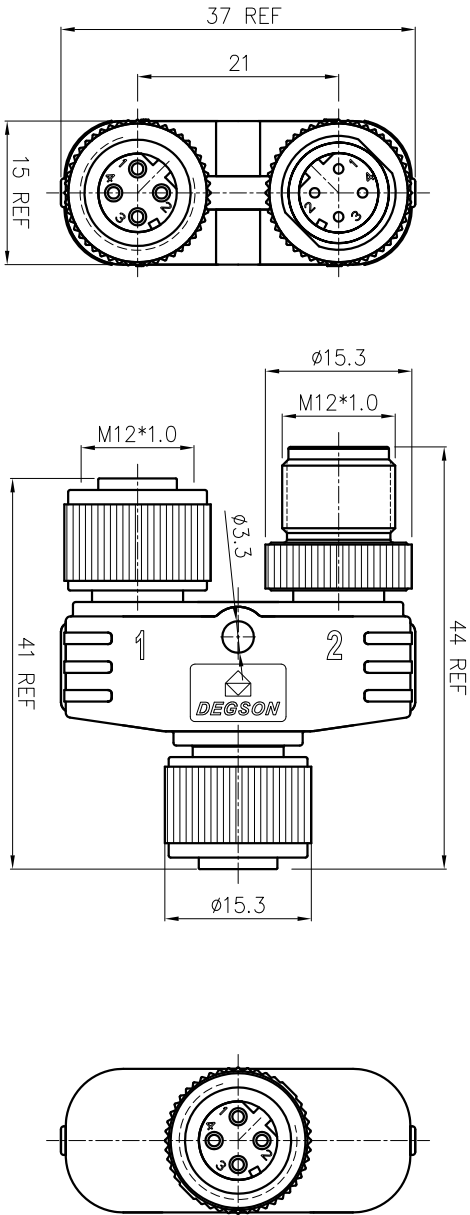

- NOTES:
- 1.RoHS Compliance,
 - 2.The Code direction is shown as diagram,
 - 3.Housing material:PU(Color:black),
 - 4.Contact body material:PU(Color:black),
 - 5.Contact material: Copper alloy,(plating: gold)
 - 6.0 Ring material: Silicone,(Color: green)
 - 7.Screw material: Zinc alloy (plating: Ni),

Female(Front view)

Male(Front view)



D-code

D-code

Dimensional tolerance (mm)

≤30	30 ~ 60	60 ~ 100	100 ~ 150	>150
±0.20	±0.30	±0.50	±0.70	±1.00

DETACHED LISTS

PART NO:	FY-M12D-04F-M12D-04F-Q-0100
APPD:	
CHKD:	
DRAFT:	WYM 2019/05/23
THIRD ANGLE PROJECTION	

NINGBO DEGSON ELECTRICAL CO., LTD

FY-M12D-04F-M12D-04F-Q-0100

TITLE:	ASSEMBLY DRAWING	REV	TO-1
DRAWING NO.:	20000783	SHEET	1/1
DO NOT SCALE DRAWING	SCALE	1:1	

Technique parameter	
Rated voltage	250V
Rated current	4A
Insulation resistance	≥100MΩ
Withstanding voltage	800V AC
Operating temperature	-25℃~+85℃
Levels of protection	IP67
Cable OD	/