

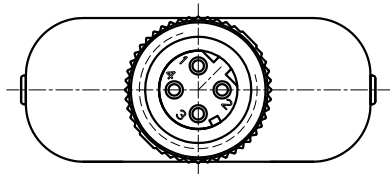
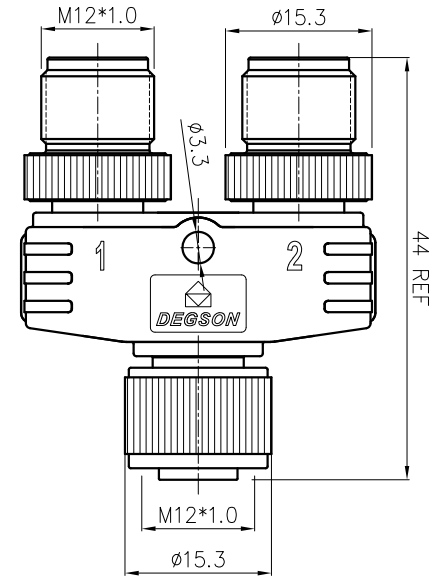


REVISION RECORD			
REV	ECN	DESCRIPTION	DRAFT DATE

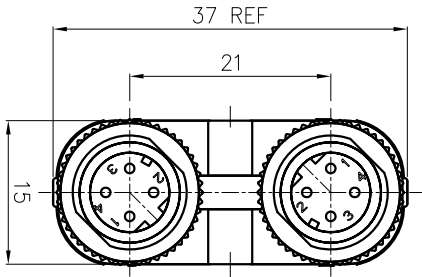



Circuit diagram:



NOTES:

- 1.RoHS Compliance,
- 2.The Code direction is shown as diagram,
- 3.Housing material:PU(Color:black),
- 4.Contact body material:PU(Color:black),
- 5.Contact material: Copper alloy,(plating: gold)
- 6.O Ring material: Silicone,(Color: green)
- 7.Screw material: Zinc alloy (plating: Ni),

Female(Front view) Male(Front view)



Dimensional tolerance (mm)

≤30	30 ~ 60	60 ~ 100	100 ~ 150	>150
±0.20	±0.30	±0.50	±0.70	±1.00

DETACHED LISTS

PART NO.: FYM12D04FM12D04MT0100	NAME: DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD
APPD: WYM	TITLE: ASSEMBLY DRAWING
CHKD: WYM	REV: TO-1
DRAFT: WYM 2019/05/23	SHEET: 1/1
THIRD ANGLE PROJECTION	SCALE: 1:1

Technique parameter

Rated voltage	250V
Rated current	4A
Insulation resistance	≥100MΩ
Withstanding voltage	800V AC
Operating temperature	-25℃~+85℃
Levels of protection	IP67
Cable OD	/

宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

FY-M12D-04F-M12D-04M-T-0100

DRAWING NO.: 20000782	REV: 1/1
DO NOT SCALE DRAWING	SCALE: 1:1