


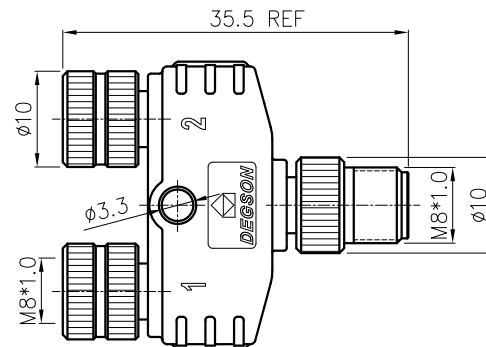


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------



Circuit diagram:




NOTES:

- 1.RoHS Compliance,
- 2.The Code direction is shown as diagram,
- 3.Housing material: PU(Color:black),
- 4.Contact body material: PU(Color:black),
- 5.Contact material: Copper alloy,(plating: gold)
- 6.O Ring material: Silicone,(Color:green)
- 7.Screw material: Copper alloy (plating: Ni),


Technique parameter

Rated voltage	60V
Rated current	3A
Insulation resistance	≥100MΩ
Withstanding voltage	500V AC
Operating temperature	-25℃~+85℃
Levels of protection	IP67
Cable OD	/

Female(Front view)



Male(Front view)



Dimensional tolerance (mm)

≤30	30 ~ 60	60 ~ 100	100 ~ 150	>150
±0.20	±0.30	±0.50	±0.70	±1.00

PART NO.:
FYM8A03MM8A03FT0100

APPD:

CHKD:

DRFT: WYM 2019/05/23



THIRD ANGLE PROJECTION

宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

NAME:

FY-M8A-03M-M8A-03F-T-0100

TITLE:

ASSEMBLY DRAWING

REV

T0-1

DRAWING NO.:

20000426

SHEET

1/1

MM
(INCH)

DO NOT SCALE DRAWING

SCALE

1:1