
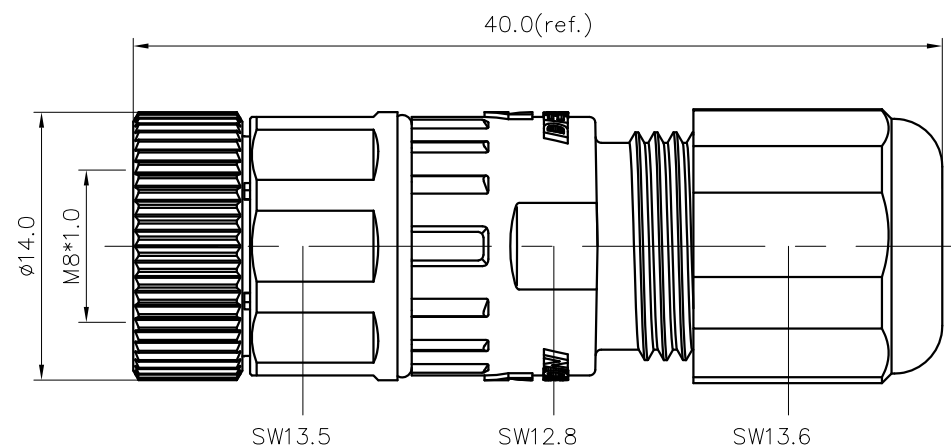


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------




PB-M8A-XXP-FF-SL7001-00A(H)

Pin number: 03,04


NOTES:

- 1.Rated voltage/current : 3pin: 60V / 3A
4pin: 60V / 3A
- 2.Withstanding voltage : 3,4pin: AC850V/1Min
- 3.Levels of protection: IP67
- 4.Wire range : 3pin: 24~22AWG/0.25~0.34mm²
4pin: 24~22AWG/0.25~0.34mm²
- 5.Cable range : 4~6mm
- 6.Wire connection mode: screw
- 7.Operating temperature: -40°C~+85°C
- 8.RoHS Compliance
- 9.Tolerance : ±0.5mm

3pin A Coding

Pin Assignment
Front View

4pin A Coding

Pin Assignment
Front View

DETACHED LISTS	PART NO.: PBM8AXXPFFSL700100AH	NINGBO DEGSON ELECTRICAL CO., LTD		
	NAME:	PB-M8A-XXP-FF-SL7001-00A(H)		
	APPD:			
	CHKD:			
	DRFT: SQ 2019.05.17	TITLE: CUSTOMER DRAWING	REV	D0-1
THIRD ANGLE PROJECTION		DRAWING NO.: XXXXXXXX-XX-CXX	SHEET	1/1
		DO NOT SCALE DRAWING	SCALE	1:1