

REVISION RECORD



REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES:

1. Rated voltage/current : 3pin: 60V / 3A
4pin: 60V / 3A
2. Withstanding voltage : 3,4pin: AC850V/1Min
3. Levels of protection: IP67
4. Wire range : 3pin: 24~22AWG/0.25~0.34mm²
4pin: 24~22AWG/0.25~0.34mm²
5. Cable range : 4~6mm
6. Wire connection mode: screw
7. Operating temperature: -40°C~+85°C
8. RoHS Compliance
9. Tolerance : ±0.5mm


PB-M8A-XXP-FF-SR7001-00A(H)

Pin number: 03,04,

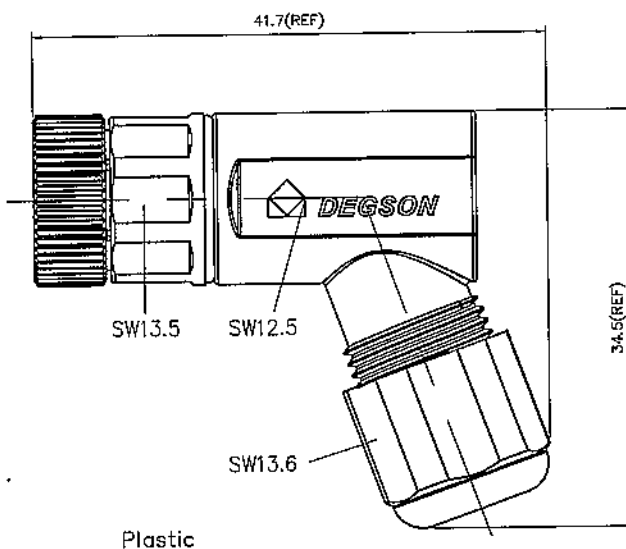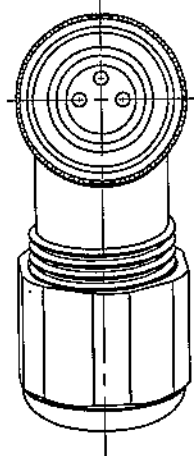


Plastic

3pin A Coding

Pin Assignment
Front View

4pin A Coding

Pin Assignment
Front View

DETACHED LISTS	PART NO.: PBM8AXXPFSR700100AH	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD: ZX 20190520	NAME: PB-M8A-XXP-FF-SR7001-00A(H)		
	CHKD: LP 2019.5.20	TITLE: CUSTOMER DRAWING		
	DRFT: SQ 2019.05.17	REV: D0-1		
THIRD ANGLE PROJECTION		DRAWING NO.: XXXXXXX-XX-CXX	SHEET: 1/1	SCALE: 1:1
		MM (INCH)	DO NOT SCALE DRAWING	