
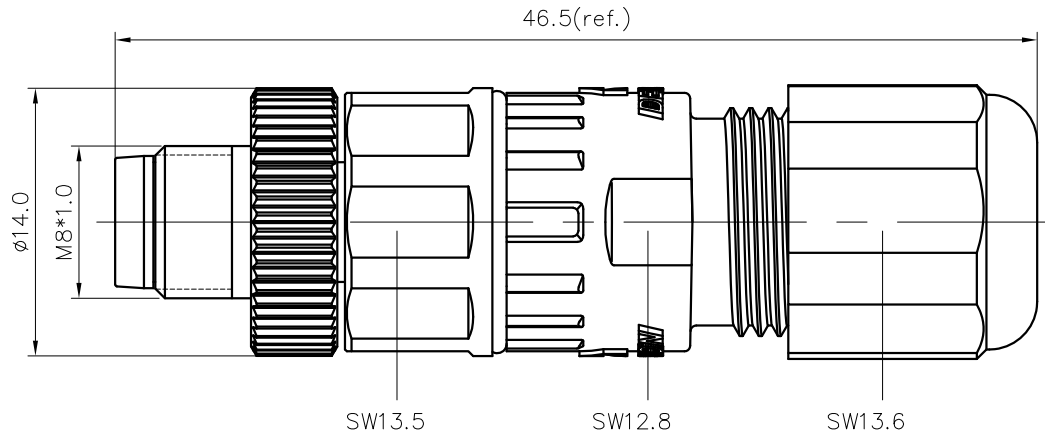


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------



PB-M8A-XXP-MM-SL7001-00A(H)


Pin number: 03,04

NOTES:


- 1.Rated voltage/current : 3pin:60V / 3A
4pin:60V / 3A
- 2.Withstanding voltage : 3,4pin: AC850V/1Min
- 3.Levels of protection:IP67
- 4.Wire range : 3pin: 24~22AWG/0.25~0.34mm²
4pin: 24~22AWG/0.25~0.34mm²
- 5.Cable range : 4~6mm
- 6.Wire connection mode:screw
- 7.Operating temperature:-40°C~+85°C
- 8.RoHS Compliance
- 9.Tolerance : ±0.5mm

3pin A Coding


4pin A Coding



Pin Assignment
Front View



Pin Assignment
Front View

DETACHED LISTS	PART NO.: PBM8AXXPMSL700100AH		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:		NAME: PB-M8A-XXP-MM-SL7001-00A(H)			
	CHKD:					
	DRFT: SQ 2019.05.17		TITLE: CUSTOMER DRAWING		REV	D0-1
	 THIRD ANGLE PROJECTION		DRAWING NO.: XXXXXXX-XX-CXX		SHEET	1/1
 MM (INCH)			DO NOT SCALE DRAWING	SCALE	1:1	