
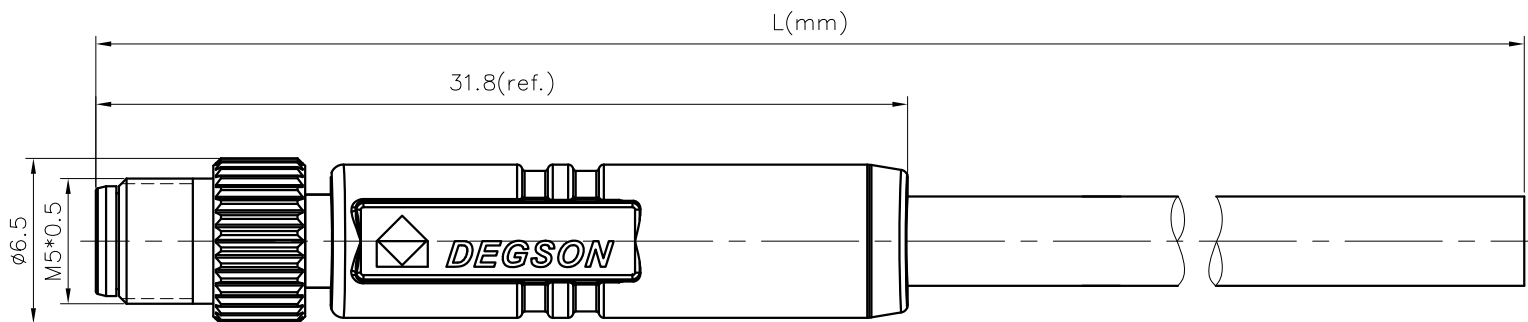


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------



PM-M5A-XXP-MM-SL7XXX-00A(H)

Pin number:03,04


Cable jacket:
A: PVC UL2517
B: PUR UL20549

Cable length
01:1M
...


99:99M
The line grows business trip:
01~05m: ± 50mm
06~10m: ± 100mm
11~30m: ± 200mm
31~99m: ± 500mm

NOTES:

- 1.Rated voltage/current : 60V / 1A
- 2.Withstanding voltage : 800V
- 3.Levels of protection:IP67
- 4.Cable specifications :
3pin A: 3C*26AWG/0.14mm²,UL2517/UL20549
4pin A: 4C*26AWG/0.14mm²,UL2517/UL20549
- 5.Wire connection mode:soldering
- 6.Operating temperature: -25°C~+80°C
- 7.RoHS Compliance
- 8.Tolerance : ±0.5mm



Pin Assignment
Front View



Pin Assignment
Front View

Pin	Wire Color	Pin	Wire Color
4	Black	3	Blue
3	Blue	2	White
1	Brown	1	Brown
Conn	Wire Color	Conn	Wire Color
Pin Out		Pin Out	

DETACHED LISTS	PART NO.: PMM5AXXPMSL7XXX00AH	NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	NAME: PM-M5A-XXP-MM-SL7XXX-00A(H)		
	CHKD:			
	DRFT: SQ 2019.05.11	TITLE: CUSTOMER DRAWING	REV: D0-1	
THIRD ANGLE PROJECTION		DRAWING NO.: XXXXXXXX-XX-CXX	SHEET: 1/1	
		MM (INCH)	DO NOT SCALE DRAWING	SCALE: 1:1