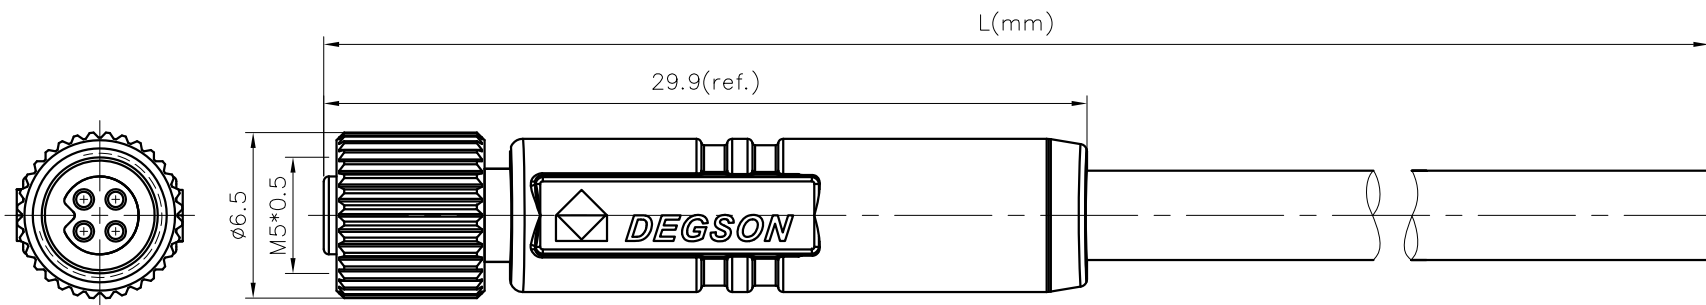


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------





PM-M5A-XXP-FF-SL7XXX-00A(H)

Pin number: 03,04

Cable jacket:
A:PVC UL2517
B: PUR UL20549Cable length
01:1M
...99:99M
The line grows business trip:
01~05m: ± 50mm
06~10m: ± 100mm
11~30m: ± 200mm
31~99m: ± 500mm

NOTES:

- 1.Rated voltage/current : 60V / 1A
- 2.Withstanding voltage : 800V
- 3.Levels of protection:IP67
- 4.Cable specifications :
3pin A: 3C*26AWG/0.14mm²,UL2517/UL20549
4pin A: 4C*26AWG/0.14mm²,UL2517/UL20549
- 5.Wire connection mode:soldering
- 6.Operating temperature: -25°C~+80°C
- 7.RoHS Compliance
- 8.Tolerance : ±0.5mm

Pin Assignment
Front ViewPin Assignment
Front View

Pin	Wire Color	Pin	Wire Color
4	Black	3	Blue
3	Blue	2	White
1	Brown	1	Brown
Conn	Wire Color	Conn	Wire Color
Pin Out		Pin Out	

DETACHED LISTS	PART NO.: PMM5AXXPFFSL7XXX00AH	NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	NAME: PM-M5A-XXP-FF-SL7XXX-00A(H)		
	CHKD:			
	DRFT: SQ 2019.05.11	TITLE: CUSTOMER DRAWING	REV	D0-1
	THIRD ANGLE PROJECTION		DRAWING NO.: XXXXXXXX-XX-CXX	SHEET 1/1
		MM (INCH)	DO NOT SCALE DRAWING	SCALE 1:1