


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

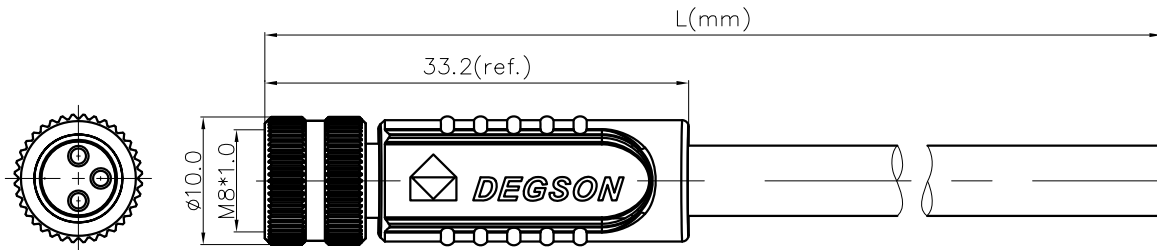

PM-M8X-XXP-FF-SL7XXX-00A(H)

Coding: A,B
Pin number: 03,04,
05,06,08

Cable jacket:
A: PVC UL2517
B: PUR UL20549
C: PVC UL2517 For UL Approve
D: PUR UL20549 For UL Approve

Cable length
01: 1M
...
99: 99M
The line grows business trip:
01~05m: ± 50mm
06~10m: ± 100mm
11~30m: ± 200mm
31~99m: ± 500mm

NOTES:

- Rated voltage/current : 3pin: 60V / 3A
4pin: 60V / 3A
5pin: 30V / 3A
6pin: 30V / 1.5A
8pin: 30V / 1.5A
- Withstanding voltage : 3,4pin: AC850V/1Min
5,6,8pin: AC650V/1Min
- Levels of protection: IP67
- Cable specifications :
3pin: 3C*24AWG/0.25mm², UL2517/UL20549
4pin: 4C*24AWG/0.25mm², UL2517/UL20549
5pin: 5C*24AWG/0.25mm², UL2517/UL20549
6pin: 6C*26AWG/0.14mm², UL2517/UL20549
8pin: 8C*26AWG/0.14mm², UL2517/UL20549
- Wire connection mode: soldering
- Operating temperature: -25°C~+80°C
- RoHS Compliance
- Tolerance : ±0.5mm

3pin A Coding	4pin A Coding	5pin B Coding	6pin A Coding	8pin A Coding
Pin Assignment Front View	Pin Assignment Front View	Pin Assignment Front View	Pin Assignment Front View	Pin Assignment Front View
4	4	5	6	8
3	3	4	5	7
1	2	3	4	6
Black	Black	Gray	Gray	Pink
Blue	Blue	Black	Black	Pink
White	White	Blue	Blue	Gray
Brown	Brown	White	White	Yellow
Pin Wire Color	Pin Wire Color	Pin Wire Color	Pin Wire Color	Pin Wire Color
Pin Out	Pin Out	Pin Out	Pin Out	Pin Out

DETACHED LISTS	PART NO.: PMM8XXXPFFSL7XXX00AH	NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	NAME: PM-M8X-XXP-FF-SL7XXX-00A(H)		
	CHKD:	TITLE: CUSTOMER DRAWING		
	DRFT: SQ 2019.09.06	DRAWING NO.: XXXXXXXX-XX-CXX		REV D0-2
	THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SHEET 1/1



宁波高松电子有限公司

NINGBO DEGSON ELECTRICAL CO., LTD

NAME:
PM-M8X-XXP-FF-SL7XXX-00A(H)

TITLE: CUSTOMER DRAWING

DRAWING NO.: XXXXXXXX-XX-CXX

DO NOT SCALE DRAWING

REV D0-2

SHEET 1/1

SCALE 1:1