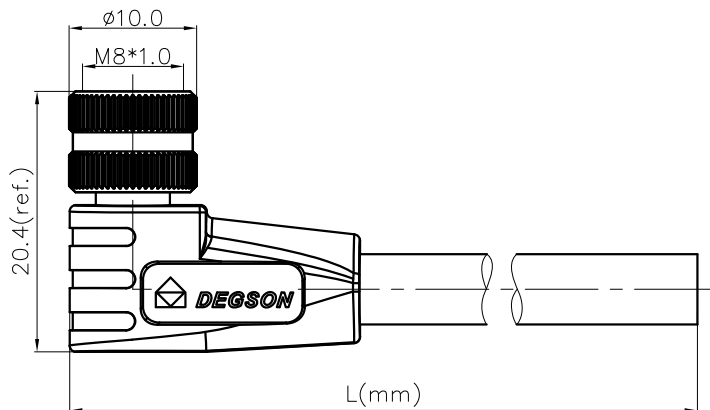
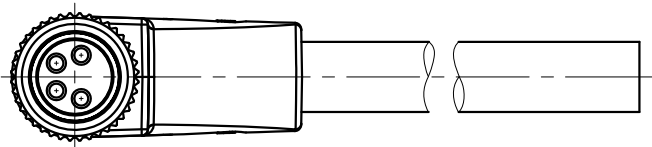


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------



PM-M8X-XXP-FF-SR7XXX-00A(H)

Coding: A,B

Pin number: 03,04,
05,06,08Cable jacket:
A: PVC UL2517
B: PUR UL20549
C: PVC UL2517 For UL Approve
D: PUR UL20549 For UL ApproveCable length
01: 1M
...


99: 99M

The line grows business trip:
01~05m: ± 50mm
06~10m: ± 100mm
11~30m: ± 200mm
31~99m: ± 500mm


NOTES:

- Rated voltage/current : 3pin: 60V / 3A
4pin: 60V / 3A
5pin: 30V / 3A
6pin: 30V / 1.5A
8pin: 30V / 1.5A
- Withstanding voltage : 3,4pin: AC850V/1Min
5,6,8pin: AC650V/1Min
- Levels of protection: IP67
- Cable specifications :
3pin: 3C*24AWG/0.25mm²,UL2517/UL20549
4pin: 4C*24AWG/0.25mm²,UL2517/UL20549
5pin: 5C*24AWG/0.25mm²,UL2517/UL20549
6pin: 6C*26AWG/0.14mm²,UL2517/UL20549
8pin: 8C*26AWG/0.14mm²,UL2517/UL20549
- Wire connection mode: soldering
- Operating temperature: -25°C~+80°C
- RoHS Compliance
- Tolerance : ±0.5mm


3pin A Coding

Pin Assignment
Front View


4pin A Coding

Pin Assignment
Front View


5pin B Coding

Pin Assignment
Front View

6pin A Coding

Pin Assignment
Front View

8pin A Coding

Pin Assignment
Front View

						8	Red		
						7	Blue		
					6	Pink	6	Pink	
				5	Gray	5	Gray	5	Gray
4	Black	4	Black	4	Black	4	Black	4	Yellow
3	Blue	3	Blue	3	Blue	3	Blue	3	Green
		2	White	2	White	2	White	2	Brown
1	Brown	1	Brown	1	Brown	1	Brown	1	White
Conn	Wire Color	Conn	Wire Color	Conn	Wire Color	Conn	Wire Color	Conn	Wire Color
Pin Out		Pin Out		Pin Out		Pin Out		Pin Out	

DETACHED LISTS	PART NO.: PMM8XXXPFFSR7XXX00AH	NINGBO DEGSON ELECTRICAL CO., LTD	
	APPD:	NAME: PM-M8X-XXP-FF-SR7XXX-00A(H)	
	CHKD:	TITLE: CUSTOMER DRAWING	
	DRFT: SQ 2019.09.06	REV	D0-2
	DRAWING NO.: XXXXXXXX-XX-CXX		SHEET 1/1
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SCALE 1:1