


REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

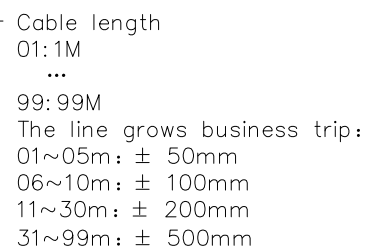


1. Rated voltage/current : 3pin: 60V / 3A
4pin: 60V / 3A
5pin: 30V / 3A
6pin: 30V / 1.5A
8pin: 30V / 1.5A

2. Withstanding voltage : 3,4pin: AC850V/1Min
5,6,8pin: AC650V/1Min

3pin: 3C*24AWG/0.25mm²,UL2517/UL20549
4pin: 4C*24AWG/0.25mm²,UL2517/UL20549
5pin: 5C*24AWG/0.25mm²,UL2517/UL20549
6pin: 6C*26AWG/0.14mm²,UL2517/UL20549
8pin: 8C*26AWG/0.14mm²,UL2517/UL20549

8.Tolerance : $\pm 0.5\text{mm}$

DETACHED LISTS	PART NO.: PMM8XXXPMMSL7XXX00AH		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:		NAME:			
	CHKD:		PM-M8X-XXP-MM-SL7XXX-00A(H)			
	DRFT: SQ 2019.09.06		TITLE: CUSTOMER DRAWING		REV	D0-2
	 THIRD ANGLE PROJECTION		DRAWING NO.: XXXXXXX-XX-CXX		SHEET	1/1
			 DO NOT SCALE DRAWING	SCALE	1:1	

THIRD ANGLE PROJECTION