


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

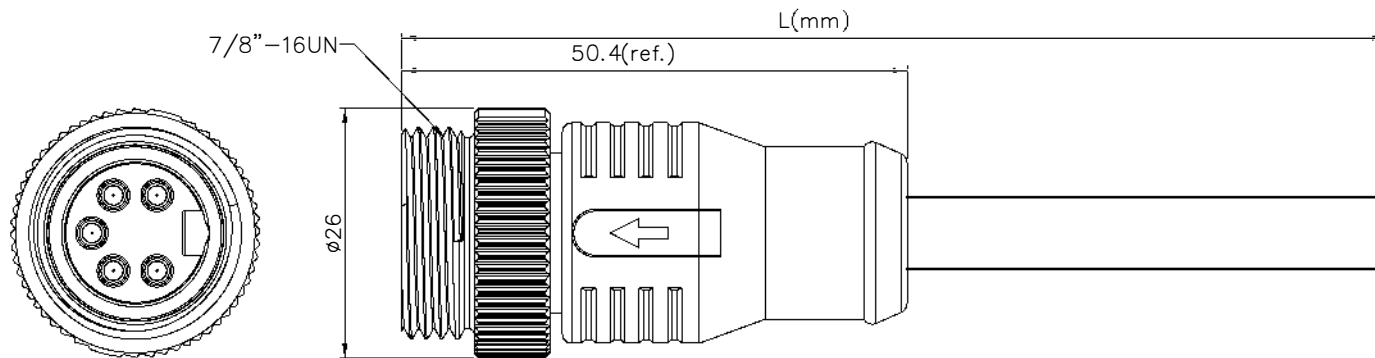

NOTES:

- 1.Rated voltage/current : 5pin :300V / 9A
4pin :300V / 13A
3pin :300V / 13A
- 2.Withstanding voltage : 5pin: AC1600V/1Min
4pin: AC1600V/1Min
3pin: AC1600V/1Min
- 3.Levels of protection:IP68
- 4.Cable specifications :
5pin:5C*16AWG,UL2586/UL20939
4pin:4C*16AWG,UL2586/UL20939
3pin:3C*16AWG,UL2586/UL20939
- 5.Wire connection mode:soldering
- 6.Operating temperature:PVC Cable: -25°C~+85°C
PUR Cable: -25°C~+80°C
- 7.RoHS Compliance
- 8.Tolerance : ±0.5mm

PM-MC-XXP-MM-SL8XXX-00A(H)

Pin number:03,04,
05

Cable jacket:
A:PVC UL2586;
B: PUR UL20939

Cable length L:

01:1M

...

99:99M

The line grows business trip:

01~05m: ± 50mm

06~10m: ± 100mm

11~30m: ± 200mm

31~99m: ± 500mm

5pin		4pin		3pin	
Pin Assignments Front View		Pin Assignments Front View		Pin Assignments Front View	
5	White	4	White	3	Blue
4	Brown	3	Brown	2	Brown
PE	Green/yellow	2	Blue	PE	Green/yellow
2	Blue	1	Black		
1	Black				
Pin	Wire Color	Pin	Wire Color	Pin	Wire Color
Pin Out		Pin Out		Pin Out	

ATTACHED LISTS	PART NO.: /		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
	APPD:		NAME: PM-MC-XXP-MM-SL8XXX-00A(H)	
	CHKD:			
	DRFT: YJH 2020.07.27		TITLE: CUSTOMER DRAWING	
	 THIRD ANGLE PROJECTION		REV D0-1	
	DRAWING NO.: XXXXXXXX-XX-CXX		SHEET 1/1	
	 MM (INCH)		DO NOT SCALE DRAWING	SCALE 1:1