
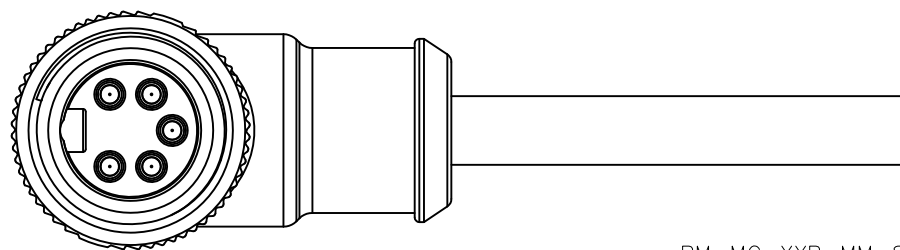


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

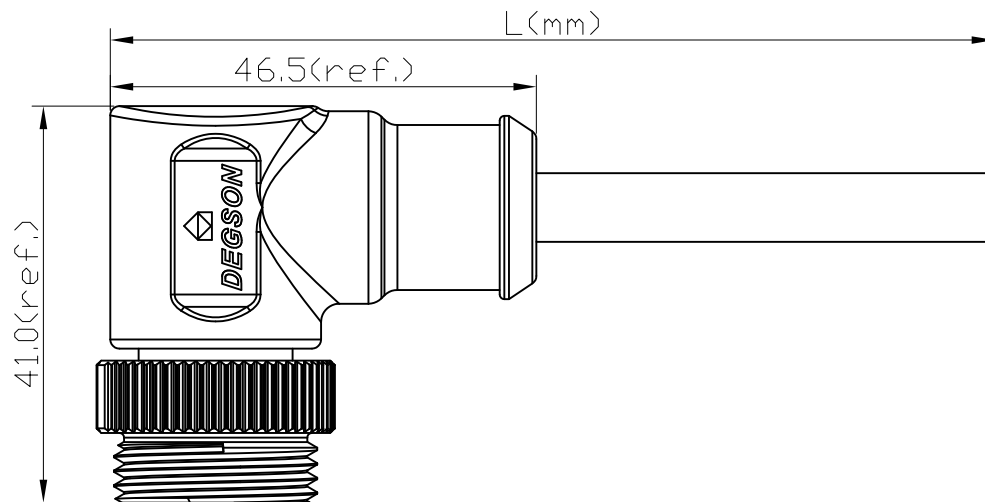

Conn1

PM-MC-XXP-MM-SR8XXX-00A(H)

Pin number: 03, 04,
05Cable jacket:
A: PVC UL2586;
B: PUR UL20939Cable length L:
01: 1M
...

99: 99M

The line grows business trip:

01~05m: ± 50mm

06~10m: ± 100mm

11~30m: ± 200mm

31~99m: ± 500mm

5pin		4pin		3pin	
Pin Assignments Front View		Pin Assignments Front View		Pin Assignments Front View	
5	White	4	White	3	Blue
4	Brown				
PE	Green/yellow	3	Brown	2	Brown
2	Blue	2	Blue	1	Black
1	Black	1	Black	PE	Green/yellow
Pin	Wire Color	Pin	Wire Color	Pin	Wire Color
Pin Out		Pin Out		Pin Out	

8

7

6

5

4

3

2

1

NOTES:

1. Rated voltage/current : 5pin : 300V / 9A

4pin : 300V / 13A

3pin : 300V / 13A

2. Withstanding voltage : 5pin: AC1600V/1Min

4pin: AC1600V/1Min

3pin: AC1600V/1Min

3. Levels of protection: IP68

4. Cable specifications :

5pin: 5C*16AWG, UL2586/UL20939

4pin: 4C*16AWG, UL2586/UL20939

3pin: 3C*16AWG, UL2586/UL20939


5. Wire connection mode: soldering

6. Operating temperature: PVC Cable: -25°C~+85°C

PUR Cable: -25°C~+80°C

7. RoHS Compliance

8. Tolerance : ±0.5mm

DETACHED LISTS	PART NO.: /		 DEGSON®		宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
	APPD:		NAME: PM-MC-XXP-MM-SR8XXX-00A(H)			
	CHKD:					
	DRFT: YJH 2020.07.27		TITLE: CUSTOMER DRAWING		REV	D0-1
	 THIRD ANGLE PROJECTION		DRAWING NO.: XXXXXXXX-XX-CXX		SHEET	1/1
				DO NOT SCALE DRAWING	SCALE	1:1