


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

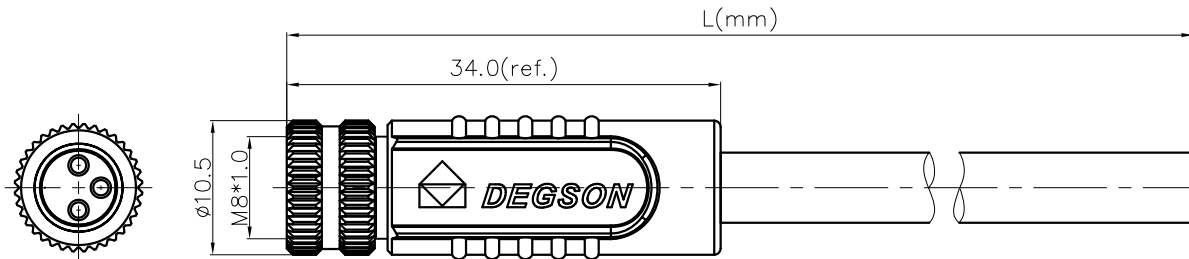

PMSH-M8X-XXP-FF-SL7XXX-00A(H)

Coding: A,B

Pin number: 03,04,
05,06,08Cable jacket:
C:PVC UL2517 For UL Approve
D:PUR UL20549 For UL ApproveCable length
01: 1M
...
99: 99M
The line grows business trip:
01~05m: ± 50mm
06~10m: ± 100mm
11~30m: ± 200mm
31~99m: ± 500mm

NOTES:

- Rated voltage/current : 3pin: 60V / 3A
4pin: 60V / 3A
5pin: 30V / 3A
6pin: 30V / 1.5A
8pin: 30V / 1.5A
- Withstanding voltage : 3,4pin: AC850V/1Min
5,6,8pin: AC650V/1Min

3.Levels of protection: IP67

4.Cable specifications :

- 3pin: 3C*24AWG/0.25mm²,Shield,UL2517/UL20549
- 4pin: 4C*24AWG/0.25mm²,Shield,UL2517/UL20549
- 5pin: 5C*24AWG/0.25mm²,Shield,UL2517/UL20549
- 6pin: 6C*26AWG/0.14mm²,Shield,UL2517/UL20549
- 8pin: 8C*26AWG/0.14mm²,Shield,UL2517/UL20549

5.Wire connection mode: soldering

6.Operating temperature: -25°C~+80°C

7.RoHS Compliance

8.Tolerance : ±0.5mm

3pin A Coding	4pin A Coding	5pin B Coding	6pin A Coding	8pin A Coding
Pin Assignment Front View	Pin Assignment Front View	Pin Assignment Front View	Pin Assignment Front View	Pin Assignment Front View
Shield	Shield	Shield	Shield	Shield
Braid	Braid	Braid	Braid	Braid
4	4	5	6	8
Black	Black	Gray	Gray	Red
3	3	4	4	7
Blue	Blue	Black	Black	Blue
2	2	3	3	6
White	White	Blue	Blue	Pink
1	1	2	2	5
Brown	Brown	White	White	Gray
Pin	Pin	Pin	Pin	Pin
Wire Color	Wire Color	Wire Color	Wire Color	Wire Color
Pin Out	Pin Out	Pin Out	Pin Out	Pin Out

DETACHED LISTS	PART NO.: PMSHM8XXXPFFSL7XXX00AH	NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	NAME: PMSH-M8X-XXP-FF-SL7XXX-00A(H)		
	CHKD:	TITLE: CUSTOMER DRAWING		
	DRFT: SQ 2019.09.06	DRAWING NO.: XXXXXXXX-XX-CXX		REV D0-2
	THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SCALE 1:1