


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

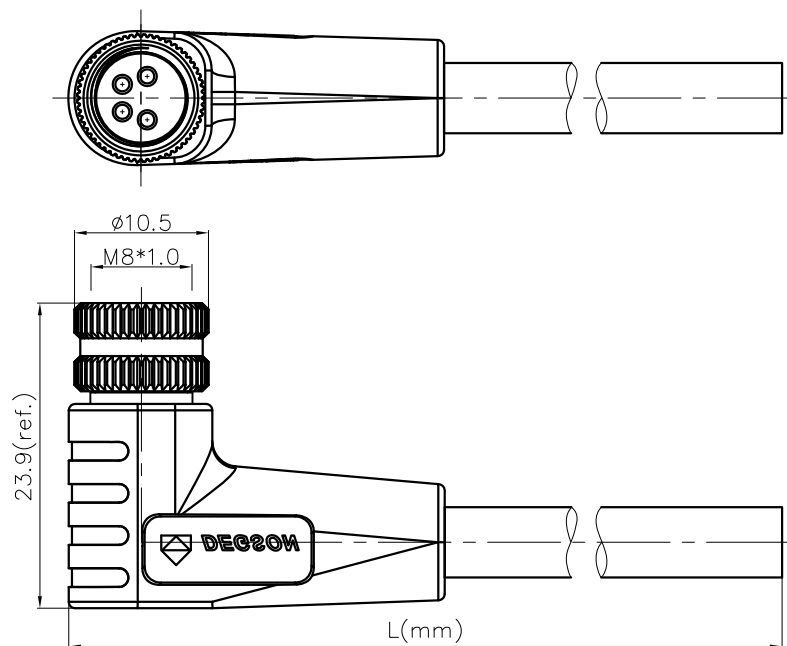

PMSH-M8X-XXP-FF-SR7XXX-00A(H)

Coding: A,B

Pin number: 03,04,
05,06,08Cable jacket:
C: PVC UL2517 For UL Approve
D: PUR UL20549 For UL ApproveCable length
01: 1M
...

99: 99M

The line grows business trip:
01~05m: ± 50mm
06~10m: ± 100mm
11~30m: ± 200mm
31~99m: ± 500mm

NOTES:

1. Rated voltage/current : 3pin: 60V / 3A

4pin: 60V / 3A

5pin: 30V / 3A

6pin: 30V / 1.5A

8pin: 30V / 1.5A

2. Withstanding voltage : 3,4pin: AC850V/1Min

5,6,8pin: AC650V/1Min

3. Levels of protection: IP67

4. Cable specifications :

3pin: 3C*24AWG/0.25mm², Shield, UL2517/UL205494pin: 4C*24AWG/0.25mm², Shield, UL2517/UL205495pin: 5C*24AWG/0.25mm², Shield, UL2517/UL205496pin: 6C*26AWG/0.14mm², Shield, UL2517/UL205498pin: 8C*26AWG/0.14mm², Shield, UL2517/UL20549

5. Wire connection mode: soldering

6. Operating temperature: -25°C~+80°C

7. RoHS Compliance

8. Tolerance : ±0.5mm

3pin A Coding	4pin A Coding	5pin B Coding	6pin A Coding	8pin A Coding
Pin Assignment Front View	Pin Assignment Front View	Pin Assignment Front View	Pin Assignment Front View	Pin Assignment Front View
Shield	Shield	Shield	Shield	Shield
Braid	Braid	Braid	Braid	Braid
4	4	5	6	8
Black	Black	Gray	Gray	Red
3	3	3	3	7
Blue	Blue	Blue	Blue	Blue
2	2	2	2	6
White	White	White	White	Pink
1	1	1	1	5
Brown	Brown	Brown	Brown	Gray
Pin	Pin	Pin	Pin	4
Wire Color	Wire Color	Wire Color	Wire Color	Yellow
Pin Out	Pin Out	Pin Out	Pin Out	3
				Green
				2
				Brown
				1
				White
				Pin
				Wire Color
				Pin Out

DETACHED LISTS	PART NO.: PMSHM8XXXPFSL7XXX00AH	NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	NAME: PMSH-M8X-XXP-FF-SR7XXX-00A(H)		
	CHKD:			
	DRFT: SQ 2019.09.06	TITLE: CUSTOMER DRAWING	REV	D0-2
	THIRD ANGLE PROJECTION		DRAWING NO.: XXXXXXXX-XX-CXX	SHEET 1/1
		MM (INCH)	DO NOT SCALE DRAWING	SCALE 1:1