
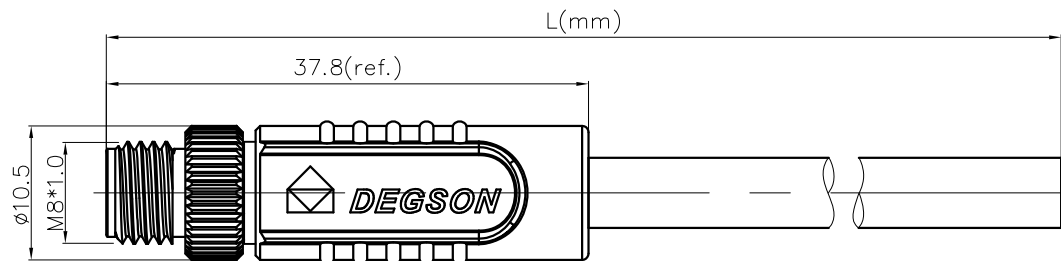


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------



PMSH-M8X-XXP-MM-SL7XXX-00A(H)

Coding: A,B

Pin number: 03,04,
05,06,08Cable jacket:
C: PVC UL2517 For UL Approve
D: PUR UL20549 For UL ApproveCable length
01: 1M
...
99: 99M
The line grows business trip:
01~05m: ± 50mm
06~10m: ± 100mm
11~30m: ± 200mm
31~99m: ± 500mm

NOTES:

- Rated voltage/current : 3pin: 60V / 3A
4pin: 60V / 3A
5pin: 30V / 3A
6pin: 30V / 1.5A
8pin: 30V / 1.5A
- Withstanding voltage : 3,4pin: AC850V/1Min
5,6,8pin: AC650V/1Min

3.Levels of protection: IP67

4.Cable specifications :

- 3pin: 3C*24AWG/0.25mm², Shield, UL2517/UL20549
- 4pin: 4C*24AWG/0.25mm², Shield, UL2517/UL20549
- 5pin: 5C*24AWG/0.25mm², Shield, UL2517/UL20549
- 6pin: 6C*26AWG/0.14mm², Shield, UL2517/UL20549
- 8pin: 8C*26AWG/0.14mm², Shield, UL2517/UL20549

5.Wire connection mode: soldering

6.Operating temperature: -25°C~+80°C

7.RoHS Compliance

8.Tolerance : ±0.5mm

3pin A Coding		4pin A Coding		5pin B Coding		6pin A Coding		8pin A Coding	
Pin Assignment Front View		Pin Assignment Front View		Pin Assignment Front View		Pin Assignment Front View		Pin Assignment Front View	
Shield	Braid	Shield	Braid	Shield	Braid	Shield	Braid	Shield	Braid
4	Black	4	Black	5	Gray	6	Pink	8	Red
3	Blue	3	Blue	4	Black	5	Gray	7	Blue
2	White	2	White	3	Blue	4	Black	6	Pink
1	Brown	1	Brown	2	White	3	Blue	5	Gray
Pin	Wire Color	Pin	Wire Color	Pin	Wire Color	Pin	Wire Color	Pin	Wire Color
Pin Out		Pin Out		Pin Out		Pin Out		Pin Out	

DETACHED LISTS	PART NO.: PMSHM8XXXPMMSL7XXX00AH		NINGBO DEGSO ELECTRICAL CO., LTD	
	APPD:		NAME: PMSH-M8X-XXP-MM-SL7XXX-00A(H)	
	CHKD:		TITLE: CUSTOMER DRAWING	
	DRFT: SQ 2019.09.06		REV	D0-2
	THIRD ANGLE PROJECTION		SHEET	1/1



宁波高松电子有限公司

NINGBO DEGSO ELECTRICAL CO., LTD

PMSH-M8X-XXP-MM-SL7XXX-00A(H)

CUSTOMER DRAWING

REV

D0-2

DRAWING NO.: XXXXXXXX-XX-CXX

SHEET

1/1

MM (INCH)

DO NOT SCALE DRAWING

SCALE

1:1