
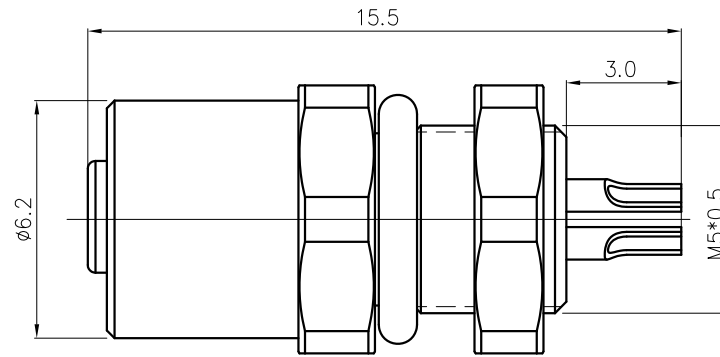


REVISION RECORD

| REV | ECN | DESCRIPTION | DRFT | DATE |
|-----|-----|-------------|------|------|
|-----|-----|-------------|------|------|

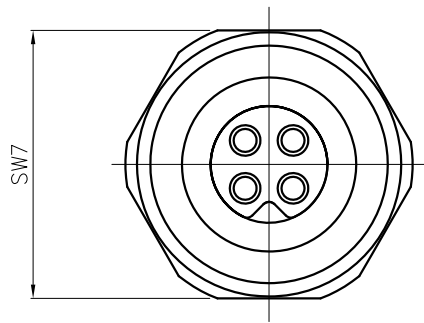

SD-M5A-XXP-FF-SH7001-00A(H)


Pin number:03,04

NOTES:


- 1.Rated voltage/current : 60V / 1A
- 2.Withstanding voltage : 800V
- 3.Levels of protection:IP67
- 4.Wire range : 26~24AWG,0.14~0.25mm<sup>2</sup>
- 5.Wire connection mode:soldering
- 6.Operating temperature: -40°C~+85°C
- 7.For Panel Thickness Range : 2.0~4.0mm
- 8.RoHS Compliance
- 9.Tolerance :  
.X ±0.25mm  
.XX ±0.1mm  
Angles ±1°

3pin A Coding


4pin A Coding



Pin Assignment  
Front View



Pin Assignment  
Front View



Panel cut

|                        |                                   |                                      |                      |           |
|------------------------|-----------------------------------|--------------------------------------|----------------------|-----------|
| DETACHED LISTS         | PART NO.:<br>SDM5AXXPFFSH700100AH | NINGBO DEGSON ELECTRICAL CO., LTD    |                      |           |
|                        | APPD:                             | NAME:<br>SD-M5A-XXP-FF-SH7001-00A(H) |                      |           |
|                        | CHKD:                             | TITLE: CUSTOMER DRAWING              |                      |           |
|                        | DRFT: SQ 2019.05.11               | REV D0-1                             |                      |           |
| THIRD ANGLE PROJECTION |                                   | DRAWING NO.: XXXXXXXX-XX-CXX         | SHEET 1/1            |           |
|                        |                                   | MM (INCH)                            | DO NOT SCALE DRAWING | SCALE 1:1 |