
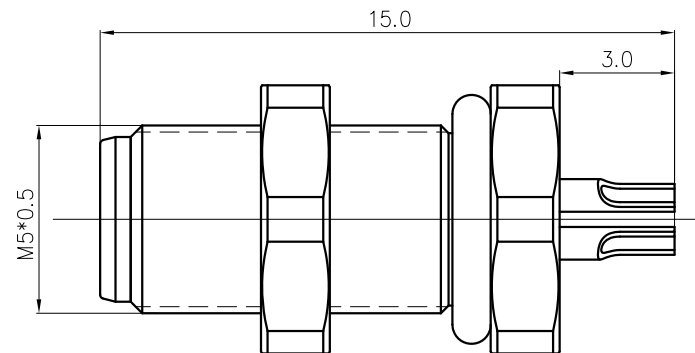


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

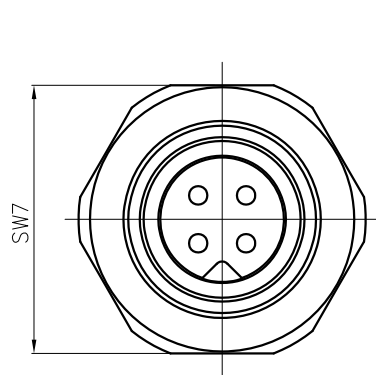


SD-M5A-XXP-MM-SF7001-00A(H)

Pin number:03,04

NOTES:


- 1.Rated voltage/current : 60V / 1A
- 2.Withstanding voltage : 800V
- 3.Levels of protection:IP67
- 4.Wire range : 26~24AWG,0.14~0.25mm²
- 5.Wire connection mode:soldering
- 6.Operating temperature: -40°C~+85°C
- 7.For Panel Thickness Range : 2.0~4.0mm
- 8.RoHS Compliance
- 9.Tolerance :
 - .X ±0.25mm
 - .XX ±0.1mm
 - Angles ±1°

3pin A Coding




Pin Assignment
Front View

4pin A Coding



Pin Assignment
Front View



Panel cut

DETACHED LISTS	PART NO.: SDM5AXXPMMSF700100AH	NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	NAME: SD-M5A-XXP-MM-SF7001-00A(H)		
	CHKD:	TITLE: CUSTOMER DRAWING		
	DRFT: SQ 2019.05.11	REV D0-1		
THIRD ANGLE PROJECTION		DRAWING NO.: XXXXXXXX-XX-CXX	SHEET 1/1	
		MM (INCH)	DO NOT SCALE DRAWING	SCALE 1:1