
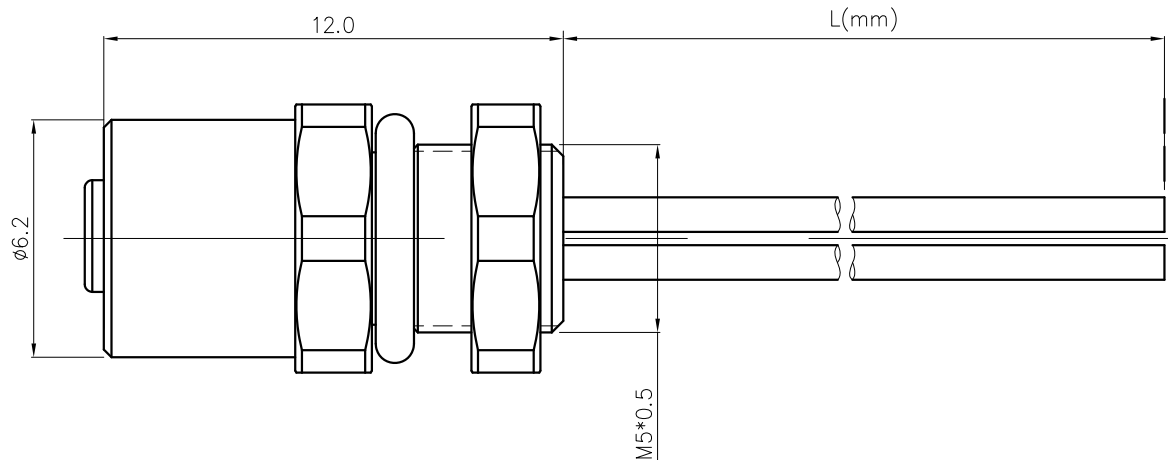


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

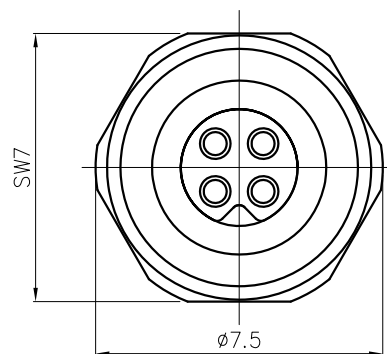


NOTES:

- 1.Rated voltage/current : 60V / 1A
- 2.Withstanding voltage : 800V
- 3.Levels of protection:IP67
- 4.Wire range : 26AWG,0.14mm²,UL1061
- 5.Wire connection mode:soldering
- 6.Operating temperature: -40°C~+85°C
- 7.For Panel Thickness Range : 2.0~4.0mm
- 8.RoHS Compliance
- 9.Tolerance :
 - .X $\pm 0.25\text{mm}$
 - .XX $\pm 0.1\text{mm}$
 - Angles $\pm 1^\circ$

SD-M5A-XXP-FF-SH7AXX-00A(H)

Pin number:03,04

XX: 150~1500mm
15: 150±15mm
30: 300±20mm
50: 500±20mm
A0: 1000±40mm
A5: 1500±40mm
Wire Length(L): 150~1500mm



Panel cut

3pin A Coding		4pin A Coding	
Pin Assignment Front View		Pin Assignment Front View	
		4	Black
4	Black	3	Blue
3	Blue	2	White
1	Brown	1	Brown
Conn	Wire Color	Conn	Wire Color
Pin Out		Pin Out	

DETACHED LISTS	PART NO.: SDM5AXXPFFSH7AXX00AH	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	NAME: SD-M5A-XXP-FF-SH7AXX-00A(H)		
	CHKD:			
	DRFT: SQ 2019.05.11	TITLE: CUSTOMER DRAWING	REV	D0-1
	THIRD ANGLE PROJECTION	DRAWING NO.: XXXXXXXX-XX-CXX	SHEET	1/1
		MM (INCH)	DO NOT SCALE DRAWING	SCALE 1:1



THIRD ANGLE PROJECTION