

## VK000058

### Connection technology • Y-distribution terminal

distributor, 19x56x19mm, 2x M8 3pin, M12 4pin, IP67, 4A



#### Electrical features

Type of plug-in contact, A connection	Female (socket)
Type of plug-in contact, B connection	Male (connector)
Type of A electrical connection	M8
Type of B electrical connection	M12
Max. total current	4A
Number of pins of slots	3
Number of pins of trunk line	4
Number of slots	2
Operating voltage (AC 50Hz)	0 - 50V
Operating voltage (DC)	0 - 60V

#### Mechanical features

Width	19mm
Height	15mm
Length	57.3mm
Degree of protection (IP)	IP67
Contact coating material	Gold
Insulating body material	Plastic (TPU)
Contact body material	Brass
Type of cable gland	none
Material of the screw fitting	Brass
Ambient temperature	-30 - 90°C

#### Other features

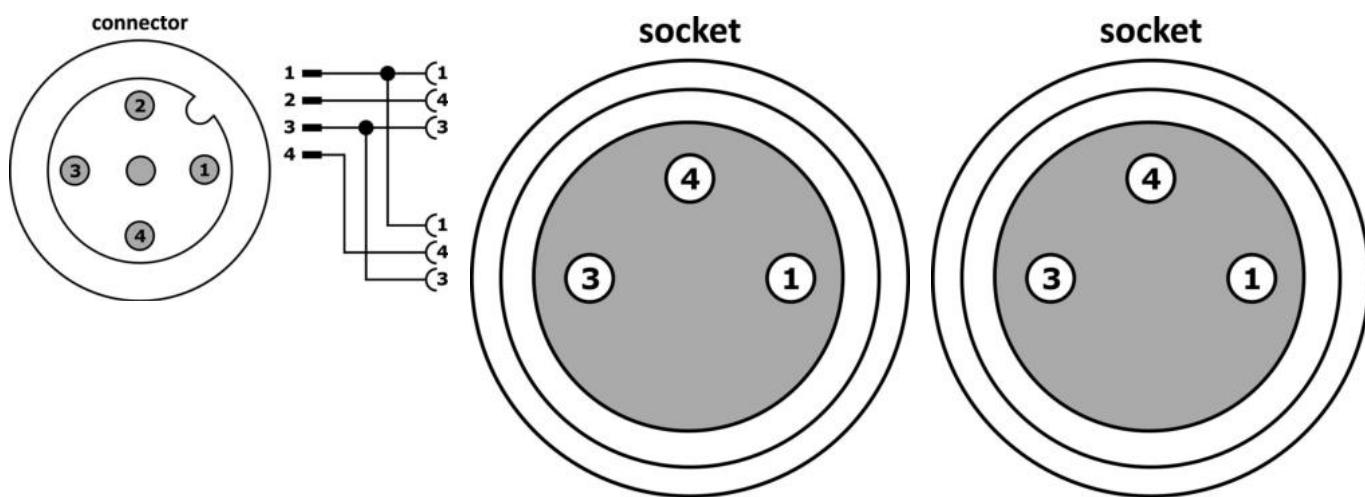
Ambient temperature	-30 - 90°C
---------------------	------------

#### Classification

ETIM 8	EC002585 Passive sensor/actuator distributor (with cable)
--------	---

**More**

IPF Product Group	855 cable sockets / connectors (distributor, accessories, diverse)
packaging dimensions	120 x 100 x 19 mm
gross weight	21 g
Customs tariff number	85444290
WEEE number	40951076
OzDS-compliant	Yes
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

**Connection****Installation**

Mounting / installation may only be carried out by a qualified electrician!

**Disposal****Safety warnings**

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website [www.ipf-electronic.com](http://www.ipf-electronic.com).

**Dimensional drawing**