

VK001038

Connection technology • Cable socket / connector Y-connection cable

Distribution terminal, series connection, 60V, 2x M12 3-pin, M12 3-pin, IP67, TPU, 4A



Electrical features

Number of electrical connections, A connection	2
Number of electrical connections, B connection	1
Type of plug-in contact, A connection	Female (socket)
Type of A electrical connection	M12
Type of B electrical connection	M12
Max. total current	4A
Number of pins of A connection	3
Number of pins of B connection	3
Operating voltage (AC 50Hz)	60V
Operating voltage (DC)	60V

Mechanical features

Conductor cross-section	0.34mm ²
Cable length	1m
Degree of protection (IP)	IP67
Ambient temperature	-25 - 80°C

Other features

Features	Series wiring
----------	---------------


Classification

ETIM 8	EC002585 Passive sensor/actuator distributor (with cable)
--------	---

More

IPF Product Group	855 cable sockets / connectors (distributor, accessories, diverse)
packaging dimensions	240 x 150 x 26 mm
gross weight	100 g
Customs tariff number	85444290
WEEE number	40951076
OzDS-compliant	Yes
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

Connection

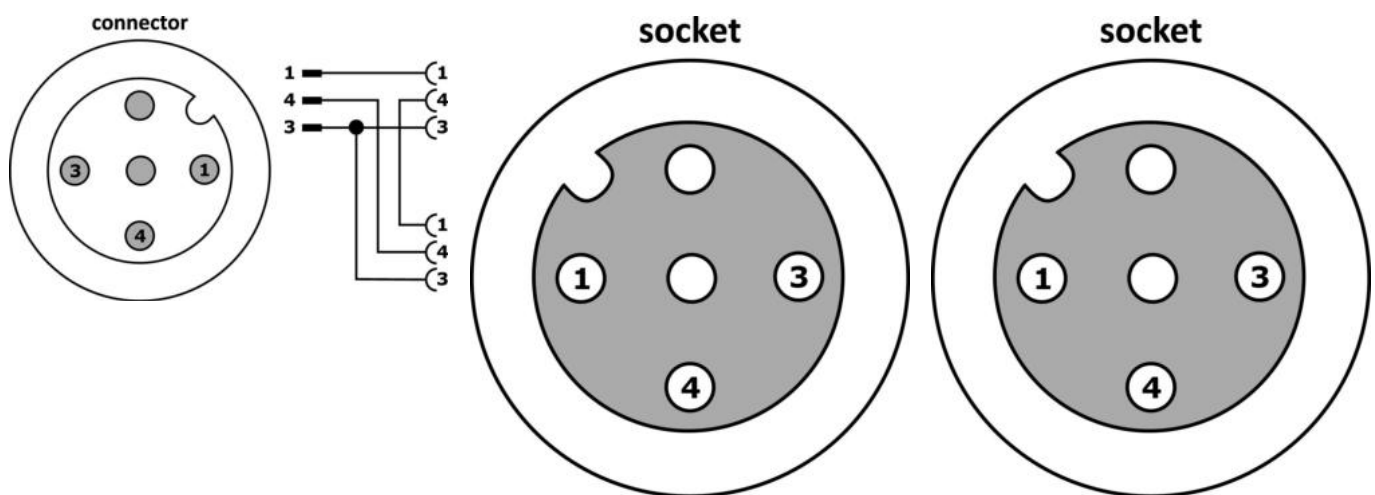

Installation



Mounting / installation may only be carried out by a qualified electrician!

Disposal



Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website www.ipf-electronic.com.