

AbN automation

IB06A236

Inductive sensors • Norm switching distance

sensor inductive, Ø6,5mm 16long, Flush, Sn: 1.5, 10-30V DC, PNP NO, Cable connector M12 0.3m, IP67, Stainless steel

including 1x Nut



Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts /bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.

Electrical features

Type of switching function	Normally open contact (NO)
Type of electrical connection	Cable connector M12
Type of switching output	PNP
Rated switching current	200mA
Switching distance	1,5mm
Operating voltage (DC)	10 - 30V

Mechanical features

Alignment of cable entry	axial
Design	Cylinder plain
Diameter	6.5mm
Cable length	0.3m
Cable infeed	axial
Length	16mm
Mechanical mounting condition for sensor	flush
Degree of protection (IP)	IP67
Housing material	Stainless steel
Ambient temperature	-25 - 70°C

Other features

Ambient temperature	-25 - 70°C
---------------------	------------

Classification


ETIM 8	EC002714 Inductive proximity switch	



More

IPF Product Group	203 inductive sensors (diverse)
packaging dimensions	120 x 100 x 25 mm
gross weight	30 g
Customs tariff number	85365019
WEEE number	40951076
Reach-compliant	Yes
RoHS-compliant	Yes

Connection

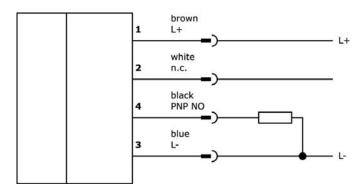

Installation Disposal



Mounting / installation may only be carried out by a qualified electrician!



Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website www.ipf-electronic.com.