

IN25C221

Inductive sensors • Norm switching distance

sensor inductive, 50x50x25mm, Non-flush, Sn: 8, 10-60V DC, PNP NO, Connector M8, IP67, PA 6.6 (synthetic)



Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts /bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.

Electrical features

Number of switching outputs	1
Display	LED display
Type of switching function	Normally open contact (NO)
Type of electrical connection	Connector M8
Type of switching output	PNP
Rated switching current	200mA
Relative hysteresis	15%
Correction factor (aluminum)	0.3
Correction factor (copper)	0.2
Correction factor (brass)	0.4
Correction factor (St37)	1
Correction factor (stainl. steel)	0.7
Short-circuit protection	Yes
No-load current	13mA
Number of pins	3
Relative repeat accuracy	5%
Residual ripple	10%
Switching distance	8mm
Switching frequency	800Hz
Switching behavior of the output	Static
Voltage drop	2.4V
Reverse polarity protection	Yes
Operating voltage (DC)	10 - 30V

Mechanical features

Design	Cuboid
Width	25mm
Height	50mm
Length	10mm
Mechanical mounting condition for sensor	non-flush
Degree of protection (IP)	IP67
Active area material of sensor	Plastic (PA6.6, glass fiber reinforced 25%)
Housing material	PA 6.6 (synthetic)
Ambient temperature	-25 - 70°C

Other features

Reference medium / object	Standard measuring plate FE360 18x18x1mm
Ambient temperature	-25 - 70°C


Classification

ETIM 8	EC002714 Inductive proximity switch
--------	-------------------------------------

More

IPF Product Group	215 inductive sensors (cuboid)
packaging dimensions	120 x 100 x 36 mm
gross weight	20 g
Customs tariff number	85365019
WEEE number	40951076
OzDS-compliant	Yes
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

Connection

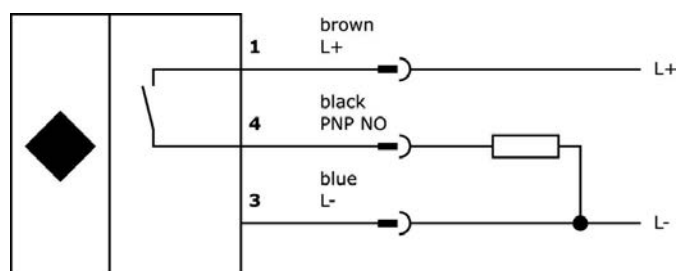

Installation



Mounting / installation may only be carried out by a qualified electrician!

Disposal



Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website www.ipf-electronic.com.

Dimensional drawing