

IN260270

Inductive sensors • Norm switching distance

sensor inductive, 40x26x12mm, Non-flush, Sn: 4, 10-30V DC, PNP NC, Connector M8, IP67, PBT



Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts /bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.

Electrical features

Type of switching function	Normally closed contact (NC)
Type of electrical connection	Connector M8
Type of switching output	PNP
Rated switching current	200mA
Switching distance	4mm
Operating voltage (DC)	10 - 30V

Mechanical features

Design	Cuboid
Width	12mm
Height	40mm
Cable infeed	axial
Length	26mm
Mechanical mounting condition for sensor	non-flush
Degree of protection (IP)	IP67
Active area material of sensor	Plastic (PBT)
Housing material	PBT
Ambient temperature	-25 - 70°C

Other features

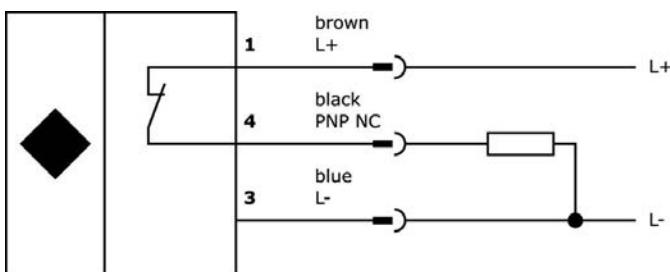
Ambient temperature	-25 - 70°C
---------------------	------------

Classification

ETIM 8	EC002714 Inductive proximity switch
--------	-------------------------------------

More

IPF Product Group	215 inductive sensors (cuboid)
packaging dimensions	120 x 100 x 12 mm
gross weight	20 g
Customs tariff number	85365019
WEEE number	40951076
OzDS-compliant	Yes
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

Connection**Installation**

Mounting / installation may only be carried out by a qualified electrician!

Disposal**Safety warnings**

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website www.ipf-electronic.com.

AbN automation

Dimensional drawing

