

IYKE0325**Inductive sensors • Ring sensors**

Sensor inductive, 72x200x200mm, ring 150, 10-35V diagnostic coverage, PNP NC/NO, M12 plug connector 3-pin, IP67, aluminum, dynamic



Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts /bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.

Electrical features

Response/decay time	0.2ms
Display	LED display
Type of switching function	Normally closed contact/normally open contact
Type of electrical connection	Connector M12
Type of switching output	PNP
Rated switching current	200mA
Setting procedure	Potentiometer
Pulse stretching	0,1 - 150ms
Short-circuit protection	Yes
No-load current	20mA
Max. parts speed	25m/s
Number of pins	3
Switching behavior of the output	Dynamic
Voltage drop	2V
Reverse polarity protection	Yes
Decay time	0.2ms
Operating voltage (DC)	10 - 35V
Output functions	Switching point

Mechanical features

Design	Ring-shaped
Width	200mm
Height	72mm
Cable infeed	axial
Length	200mm
Mechanical mounting condition for sensor	non-flush
Ring diameter	150mm
Degree of protection (IP)	IP67
Active area material of sensor	Plastic (POM)
Housing material	Aluminum
Ambient temperature	0 - 50°C

Optical features

Min. object size	10mm
------------------	------

Other features

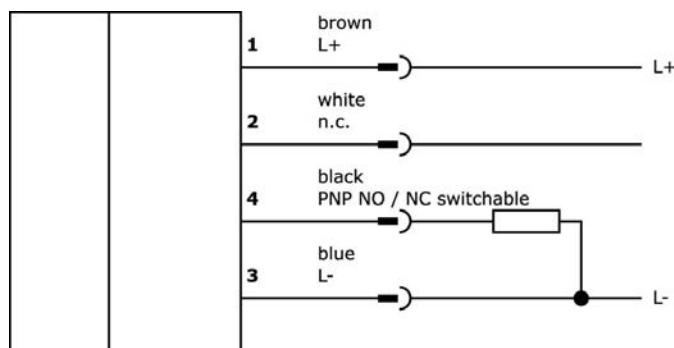
Feeding technology	Yes
Reference medium / object	Steel ball
Ambient temperature	0 - 50°C

Classification

ETIM 8	EC002714 Inductive proximity switch
--------	-------------------------------------

More

IPF Product Group	211 inductive sensors (ring/hose)
packaging dimensions	230 x 220 x 90 mm
gross weight	2460 g
Customs tariff number	85365019
WEEE number	40951076
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

Connection

Installation

Mounting / installation may only be carried out by a qualified electrician!

Disposal**Safety warnings**

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website www.ipf-electronic.com.

Dimensional drawing