

OG05057A

Optical sensors • Forked light barriers

Sensor Optical, fork, 28x10x60mm, fork width 5mm, 10-30V DC, 1x PNP/NPN NC/NO, M8-connector 4pin, IP67, zinc die casting+plastic, infrared light, 3kHz clocked, teach-in, remote teach



Special design of through-beam sensor. Transmitter and receiver are located in the fork or angular limbs and are perfectly aligned to each other.

Electrical features

Response/decay time	0.17ms
Number of switching outputs	1
Resolution	0.5mm
Type of the forked light barrier	Standard
Type of switching function	Normally closed contact/normally open contact
Type of electrical connection	Connector M8
Type of switching output	PNP/NPN
Rated switching current	100mA
Setting procedure	Teach in, remote-teach
Absolute hysteresis	0.15mm
No-load current	35mA
Number of pins	4
Repeatability +/-	50µm
Switching frequency	3000Hz
Protection class	III
Voltage drop	2V
Scanning function	Light-/dark-on mode
Decay time	0.17ms
Absolute repeat accuracy	0.03mm
Operating voltage (DC)	10 - 30V
Output functions	Switching point

Mechanical features

Design	Cuboid
Fork light barrier design	Furcate
Width	60mm
Fork depth	50mm
Fork width	5mm
Height	28.5mm
Length	10mm
Degree of protection (IP)	IP67
Active area material of sensor	Plastic
Housing material	Zinc die-cast
Ambient temperature	-10 - 60°C

Optical features

Light source	Infrared light
Light beam form	Point
Min. object size	0.5mm
Light wavelength of the transmitter diode	880nm
Wavelength of the sensor	880nm
Pulsed light source	Yes

Other features

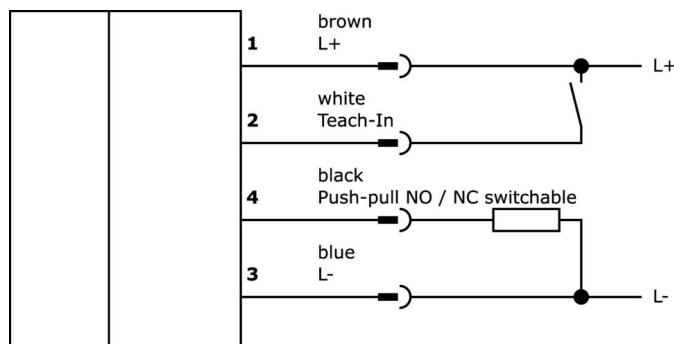
Ambient temperature	-10 - 60°C
---------------------	------------

Classification

ETIM 8	EC002720 Fork light barrier
--------	-----------------------------

More

IPF Product Group	110 fork / angular light barriers
packaging dimensions	123 x 77 x 25 mm
gross weight	60 g
Customs tariff number	85365019
WEEE number	40951076
Reach-compliant	Yes
RoHS-compliant	Yes

Connection

Installation

Mounting / installation may only be carried out by a qualified electrician!

Disposal**Safety warnings**

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website www.ipf-electronic.com.