

OG900375

Optical sensors • Forked light barriers

sensor optical, fork, Difference evaluation, 110x10x115mm, fork width 90mm, 12-35V DC, 1x PNP NC/NO, Connector M8 3pin, IP67, Aluminum+Plastic, Infrared light, 5kHz, Manual adjustment



Detection of transparent materials

Special design of through-beam sensor. Transmitter and receiver are located in the fork or angular limbs and are perfectly aligned to each other.

Electrical features

Response/decay time	0.1ms
Number of switching outputs	1
Resolution	0.25mm
Type of switching function	Normally closed contact/normally open contact
Type of electrical connection	Connector M8
Type of switching output	PNP
Rated switching current	200mA
Setting procedure	Potentiometer
Absolute hysteresis	0.2mm
Short-circuit protection	Yes
No-load current	35mA
Number of pins	3
Repeatability +/-	10µm
Switching frequency	5000Hz
Protection class	III
Voltage drop	2.5V
Scanning function	Light-/dark-on mode
Reverse polarity protection	Yes
Decay time	0.1ms
Absolute repeat accuracy	0.25mm
Operating voltage (DC)	12 - 35V
Output functions	Switching point

Mechanical features

Design	Cuboid
Fork light barrier design	Furcate
Width	115mm
Fork depth	80mm
Fork width	90mm
Height	110mm
Length	10mm
Degree of protection (IP)	IP67
Active area material of sensor	Plastic
Housing material	Aluminum
Transparent material detection	Yes
Ambient temperature	0 - 60°C

Optical features

Light source	Infrared light
Light beam form	Point
Min. object size	0.25mm
Light wavelength of the transmitter diode	880nm
Wavelength of the sensor	880nm

Other features

Features	Dual-beam
Feeding technology	Yes
Ambient temperature	0 - 60°C
Version	Differential fork


Classification

ETIM 8	EC002720 Fork light barrier
--------	-----------------------------

More

IPF Product Group	110 fork / angular light barriers
packaging dimensions	162 x 130 x 35 mm
gross weight	147 g
Customs tariff number	85365019
WEEE number	40951076
Reach-compliant	Yes
RoHS-compliant	Yes

Connection

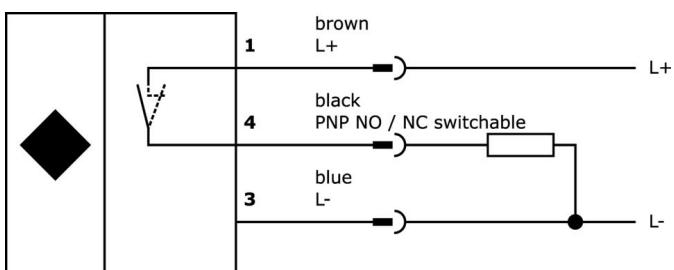

Installation



Mounting / installation may only be carried out by a qualified electrician!

Disposal



Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website www.ipf-electronic.com.

Dimensional drawing

