

## OR18A319

### Optical sensors • Retro-reflective sensors

sensor optical, reflective, M18x1 78long, Polarized red light, Point, Manual adjustment, Sn: 4000, 10-30V DC, PNP NC/NO, Connector M12 4pin, IP67, Brass Nickel-plated+PMMA, With polarizing filter

including 2x Nut, 1x Screwdriver



Optical sensors function contactlessly. They detect objects independent of their characteristics (e.g., shape, color, surface structure, material). The basic operating principle is based on the transmission and reception of light. There are three different versions: 1. The through-beam sensor consists of two separate devices, a transmitter and a receiver that are aligned with one another. If the light beam between the two devices is interrupted, the switching output integrated in the receiver changes its status. 2. With the retro-reflective sensor, the transmitter and receiver are located in one device. The emitted light beam is reflected back to the receiver by a reflector that is to be mounted opposite the device. As soon as the light beam is interrupted, the switching output integrated in the device changes its status. 3. With the diffuse reflection sensor, the transmitter and receiver are in one device. The emitted light beam is reflected by the object that is to be detected. As soon as the receiver detects the reflected light, the switching output integrated in the device changes its status.

#### Electrical features

Response/decay time	1ms
Display	LED display
Type of switching function	Normally closed contact/normally open contact
Type of electrical connection	Connector M12
Type of switching output	PNP
Rated switching current	200mA
Setting procedure	Potentiometer
Short-circuit protection	Yes
No-load current	25mA
Number of pins	4
Switching distance	0 - 4000mm
Switching frequency	500Hz
Voltage drop	2.5V
Scanning function	Light-/dark-on mode
Reverse polarity protection	Yes
Decay time	1ms
Operating voltage (DC)	10 - 30V
With polarizing filter	Yes
Interference suppression	Yes
Output functions	Switching point

**Mechanical features**

Design	Cylinder, screw-thread
Thread pitch	1mm
Storage temperature	-30 - 70°C
Length	78mm
Surface	nickel-plated
Degree of protection (IP)	IP67
Active area material of sensor	Plastic (PMMA)
Housing material	Brass
Thread dimension	M18
Ambient temperature	-25 - 70°C

**Optical features**

Light source	Polarized red light
Light beam form	Point
Wavelength of the sensor	632nm

**Other features**

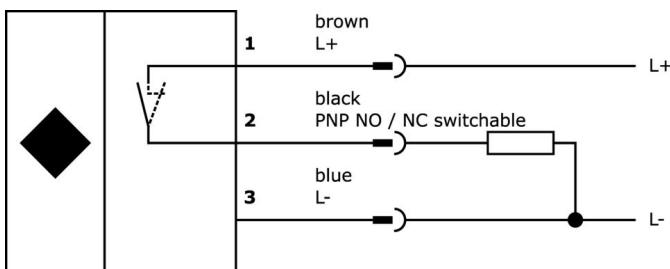
Reference medium / object	AO000007
Ambient temperature	-25 - 70°C

**Classification**

ETIM 8	EC002717 Retro-reflective sensor
--------	----------------------------------

**More**

IPF Product Group	100 optical sensors
packaging dimensions	123 x 77 x 25 mm
gross weight	70 g
Customs tariff number	85365019
WEEE number	40951076
Reach-compliant	Yes
RoHS-compliant	Yes

**Connection****Installation**

Mounting / installation may only be carried out by a qualified electrician!

**Disposal**

**Safety warnings**

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website [www.ipf-electronic.com](http://www.ipf-electronic.com).