

OS18002C

Optical sensors • Through-beam sensors transmitters

Sensor Optical, through-beam sensor Transmitter, M18x1 75long, Sn: 20m, 10-35V
diagnostic coverage, M12 connector 3-pin, IP67, chrome-plated brass+glass, red light
unpolarized

including Nut, Toothed washer



Optical sensors function contactlessly. They detect objects independent of their characteristics (e.g., shape, color, surface structure, material). The basic operating principle is based on the transmission and reception of light. There are three different versions: 1. The through-beam sensor consists of two separate devices, a transmitter and a receiver that are aligned with one another. If the light beam between the two devices is interrupted, the switching output integrated in the receiver changes its status. 2. With the retro-reflective sensor, the transmitter and receiver are located in one device. The emitted light beam is reflected back to the receiver by a reflector that is to be mounted opposite the device. As soon as the light beam is interrupted, the switching output integrated in the device changes its status. 3. With the diffuse reflection sensor, the transmitter and receiver are in one device. The emitted light beam is reflected by the object that is to be detected. As soon as the receiver detects the reflected light, the switching output integrated in the device changes its status.

Electrical features

Type of electrical connection	Connector M12
Readiness delay	20ms
No-load current	15mA
No-load current, transmitter	15mA
Number of pins	3
Residual ripple	20%
Switching distance	0 - 20000mm
Clock frequency of the transmitter	15kHz
Reverse polarity protection	Yes
Operating voltage (DC)	10 - 35V

Mechanical features

Design	Cylinder, screw-thread
Thread length	45mm
Thread pitch	1mm
Length	75mm
Maximum tightening torque	20Nm
Surface	Chrome-plated
Degree of protection (IP)	IP67
Active area material of sensor	glass
Housing material	Brass
Thread dimension	M18
Ambient temperature	-25 - 55°C

Optical features

Light source	Polarity free red light
Light exit	Lateral
Light beam form	Point
Wavelength of the sensor	660nm

Other features

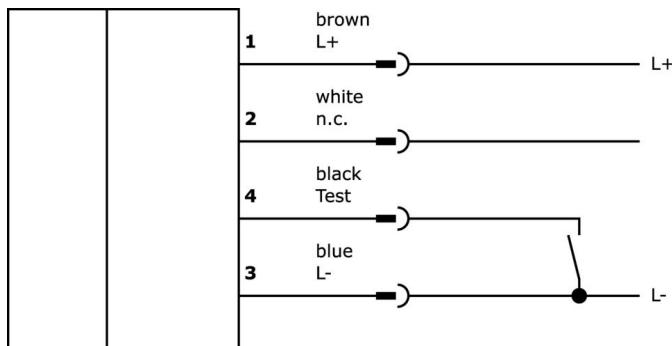
Features	with test input
Scope of delivery	Transmitter
Version	Through-beam sensor transmitter

Classification

ETIM 8	EC002716 Through-beam photoelectric sensor
--------	--

More

IPF Product Group	100 optical sensors
packaging dimensions	123 x 77 x 25 mm
gross weight	69 g
Customs tariff number	85365019
WEEE number	40951076
Reach-compliant	Yes
RoHS-compliant	Yes

Connection**Installation**

Mounting / installation may only be carried out by a qualified electrician!

Disposal**Safety warnings**

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website www.ipf-electronic.com.

Dimensional drawing

