

## OT08E185

### Optical sensors • Diffuse reflection sensors with intensity differentiation

sensor optical, diffuse-reflection sensor, M8x1 41long, Sn: 1-60, 10-30V DC, 1x PNP NO (NO), Connector M8 3pin, IP67, Stainless steel 1.4305+PMMA, 0.5kHz, Polarity free red light, Point

including 2x Nut, 2x Toothed washer



Optical sensors function contactlessly. They detect objects independent of their characteristics (e.g., shape, color, surface structure, material). The basic operating principle is based on the transmission and reception of light. There are three different versions: 1. The through-beam sensor consists of two separate devices, a transmitter and a receiver that are aligned with one another. If the light beam between the two devices is interrupted, the switching output integrated in the receiver changes its status. 2. With the retro-reflective sensor, the transmitter and receiver are located in one device. The emitted light beam is reflected back to the receiver by a reflector that is to be mounted opposite the device. As soon as the light beam is interrupted, the switching output integrated in the device changes its status. 3. With the diffuse reflection sensor, the transmitter and receiver are in one device. The emitted light beam is reflected by the object that is to be detected. As soon as the receiver detects the reflected light, the switching output integrated in the device changes its status.

#### Electrical features

Response/decay time	1ms
Number of switching outputs	1
Display	LED display
Type of switching function	Normally open contact (NO)
Type of electrical connection	Connector M8
Type of switching output	PNP
Rated switching current	100mA
Readiness delay	20ms
Short-circuit protection	Yes
No-load current	15mA
Number of pins	3
Residual ripple	10%
Switching distance	1 - 60mm
Switching frequency	500Hz
Protection class	III
Voltage drop	0.7V
Scanning function	Light switching
Reverse polarity protection	Yes
Decay time	1ms
Operating voltage (DC)	10 - 30V

### Mechanical features

Design	Cylinder, screw-thread
Thread length	21.2mm
Thread pitch	1mm
Length	41.3mm
Degree of protection (IP)	IP67
Active area material of sensor	Plastic (PMMA)
Housing material	Stainless steel 1.4305
Thread dimension	M8
Ambient temperature	-5 - 55°C

### Optical features

Light source	Polarity free red light
Light exit	axial
Light beam form	Point
Wavelength of the sensor	645nm
Light spot diameter at focal point	2.8mm

### Other features

Feeding technology	Yes
Reference medium / object	Material with 90% reflectivity
Ambient temperature	-5 - 55°C


### Classification

ETIM 8	EC001821 Light sensor energetic
--------	---------------------------------

### More

IPF Product Group	100 optical sensors
packaging dimensions	123 x 77 x 25 mm
gross weight	30 g
Customs tariff number	85365019
WEEE number	40951076
OzDS-compliant	Yes
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

### Connection

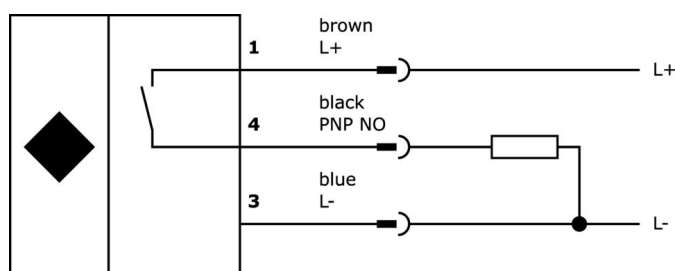

#### Installation



Mounting / installation may only be carried out by a qualified electrician!

#### Disposal



#### Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website [www.ipf-electronic.com](http://www.ipf-electronic.com).

#### Dimensional drawing

