

OTQ90175

Optical sensors • Diffuse reflection sensors with background suppression

sensor optical, diffuse-reflection sensor, 16x16x9,2mm, Sn: 2-60, 10-30V DC, 1x PNP
Programmable/configurable, Cable connector M8 4pin 0.2m PUR (Polyurethane), IP65,
PMMA+PMMA, 1kHz, Polarity free red light, Point, Teach-In

including 1x Holder



Optical sensors function contactlessly. They detect objects independent of their characteristics (e.g., shape, color, surface structure, material). The basic operating principle is based on the transmission and reception of light. There are three different versions: 1. The through-beam sensor consists of two separate devices, a transmitter and a receiver that are aligned with one another. If the light beam between the two devices is interrupted, the switching output integrated in the receiver changes its status. 2. With the retro-reflective sensor, the transmitter and receiver are located in one device. The emitted light beam is reflected back to the receiver by a reflector that is to be mounted opposite the device. As soon as the light beam is interrupted, the switching output integrated in the device changes its status. 3. With the diffuse reflection sensor, the transmitter and receiver are in one device. The emitted light beam is reflected by the object that is to be detected. As soon as the receiver detects the reflected light, the switching output integrated in the device changes its status.

Electrical features

Response/decay time	0.5ms
Number of switching outputs	1
Display	LED display
Type of switching function	Programmable/configurable
Type of electrical connection	Cable connector M8
Type of switching output	PNP
Rated switching current	100mA
Setting procedure	Teach-In
Short-circuit protection	Yes
No-load current	25mA
Number of pins	4
Switching distance	2 - 60mm
Switching frequency	1000Hz
Voltage drop	1.8V
Scanning function	Light-/dark-on mode
Reverse polarity protection	Yes
Decay time	0.5ms
Operating voltage (DC)	10 - 30V
Interference suppression	Yes

Mechanical features

Number of cores	4
Conductor cross-section	0.1mm ²
Design	Cuboid
Width	9.2mm
Height	16.2mm
Cable length	0.2m
Length	15.8mm
Maximum tightening torque	0.2Nm
Degree of protection (IP)	IP65
Volume	Small
Active area material of sensor	Plastic (PMMA)
Housing material	PMMA
Material of cable sheath	Plastic (PUR)
Ambient temperature	-20 - 50°C

Optical features

Light source	Polarity free red light
Light beam form	Point
Wavelength of the sensor	660nm

Other features

Operational mode	Background suppression
Reference medium / object	Material with 90% reflectivity
Ambient temperature	-20 - 50°C


Classification

ETIM 8	EC002719 Photoelectric proximity switch with background suppression
--------	---

More

IPF Product Group	100 optical sensors
packaging dimensions	123 x 77 x 25 mm
gross weight	20 g
Customs tariff number	85365019
WEEE number	40951076
OzDS-compliant	Yes
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

Connection

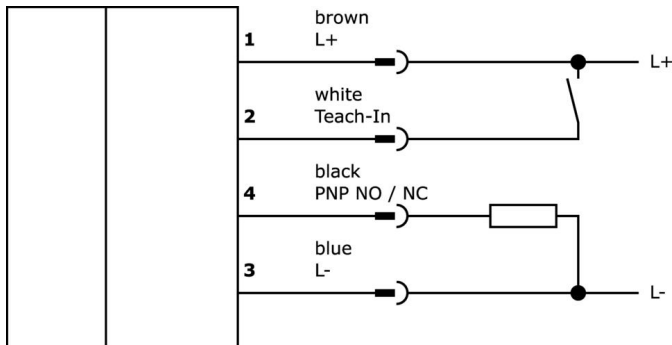

Installation



Mounting / installation may only be carried out by a qualified electrician!

Disposal



Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website www.ipf-electronic.com.

Dimensional drawing

