

OV580980

High performance light barriers • Amplifier

High-power photoelectric sensor amplifier, 76x78x40mm, 24V, change-over contact (NO/NC), 11-pin plug connection, IP40, plastic



The article OV580980 is a single-channel amplifier for a light barrier from the subgroup "Amplifiers". As part of the "High-performance light barriers" super-group, this amplifier is characterized by a range of up to 70000mm. It is part of a system consisting of a transmitter, a receiver and an amplifier. These high performance light barriers are extremely insensitive to dirt and have a high penetration power in heavy soiling, making them ideal for industrial areas such as the wood and paper industry, vehicle washing systems, the food industry and more. The easy mounting and handling emphasize the high user-friendliness of this amplifier.

Electrical features

Number of channels	1
Number of contacts as change-over contact	1
Number of switching outputs	1
Display	LED display
Type of switching function	Change-over contact (NO/NC)
Type of electrical connection	Plug-in connection
Type of switching output	Relay contact
Rated switching current	5000mA
Input voltage tolerance	20%
Setting procedure	Potentiometer
No-load current	83mA
Power consumption	2VA
Number of pins	11
Switching distance	0 - 70000mm
Switching frequency	18Hz
Switching capacity	120VA
Switching voltage	24V
Switching voltage AC	230V
Switching voltage DC	24V
Operating voltage (DC)	19,2 - 28,8V

Mechanical features

Design	Cuboid
Width	40mm
Height	76.5mm
Length	78.5mm
Mounting method	Relay base
Degree of protection (IP)	IP40
Housing material	Plastic
Ambient temperature	-25 - 50°C

Optical features

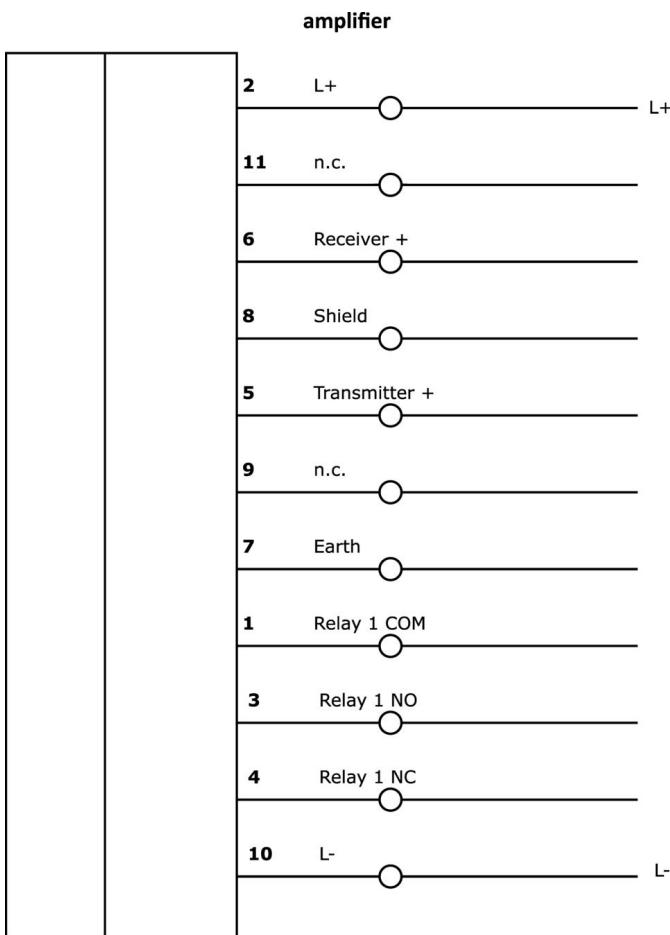
Range (transmitter with increased power, receiver with short design)	30
Range (transmitter with increased power, receiver with normal design)	35
Range (transmitter with maximum power, receiver with short design)	50
Range (transmitter with maximum power, receiver with normal design)	70
Range (transmitter with normal power, receiver with short design)	20
Range (transmitter with normal power, receiver with normal design)	25

Classification

ETIM 8	EC001485 Isolation amplifier
--------	------------------------------

More

IPF Product Group	101 high performance through-beam sensors and amplifiers
packaging dimensions	120 x 83 x 47 mm
gross weight	150 g
Customs tariff number	85365019
WEEE number	40951076
Reach-compliant	Yes
RoHS-compliant	Yes

Connection**Installation**

Mounting / installation may only be carried out by a qualified electrician!

Disposal**Safety warnings**

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website www.ipf-electronic.com.

Dimensional drawing

