

## OV58A854

### High performance light barriers • Amplifier

High-power photoelectric sensor amplifier, 76x78x40mm, 24V, NO/NC, 0-10V, plug connection 11-pin, IP40, plastic



The article "OV58A854" is a single-channel amplifier for a light barrier. It belongs to the "amplifier" subgroup, which processes information from the receiver and regulates the power of the transmitter. This subgroup is part of the "High-performance light barriers" supergroup, which has been specially developed for demanding applications.

The OV58A854 amplifier is characterized by its simple installation and high user-friendliness. It enables a range of up to 60m and is extremely insensitive to dirt. The amplifier guarantees reliable performance even when heavily soiled with chips, dust, flour, oil or dirty water. Thanks to the large angle of beam spread, it facilitates alignment and remains insensitive to vibrations and shocks.

Overall, the OV58A854 amplifier offers the perfect solution for demanding applications in the wood and paper industry, vehicle washing systems, bulk material control, elevators, outdoor gate controls, the food industry and many other areas. It is robust, compact and ensures reliable performance even under adverse conditions.

#### Electrical features

Number of presets to be set	2
Number of channels	1
Number of contacts as change-over contact	1
Number of switching outputs	1
Display	LED display
Type of switching function	Normally closed contact/normally open contact
Type of analog output	0 - 10V
Type of electrical connection	Plug-in connection
Type of switching output	PNP/NPN
Rated switching current	100mA
Input voltage tolerance	20%
Setting procedure	Potentiometer
Power consumption	2VA
Number of pins	11
Switching frequency	30Hz
Switching capacity	3VA
Switching voltage	24V
Operating voltage (DC)	19,2 - 28,8V

**Mechanical features**

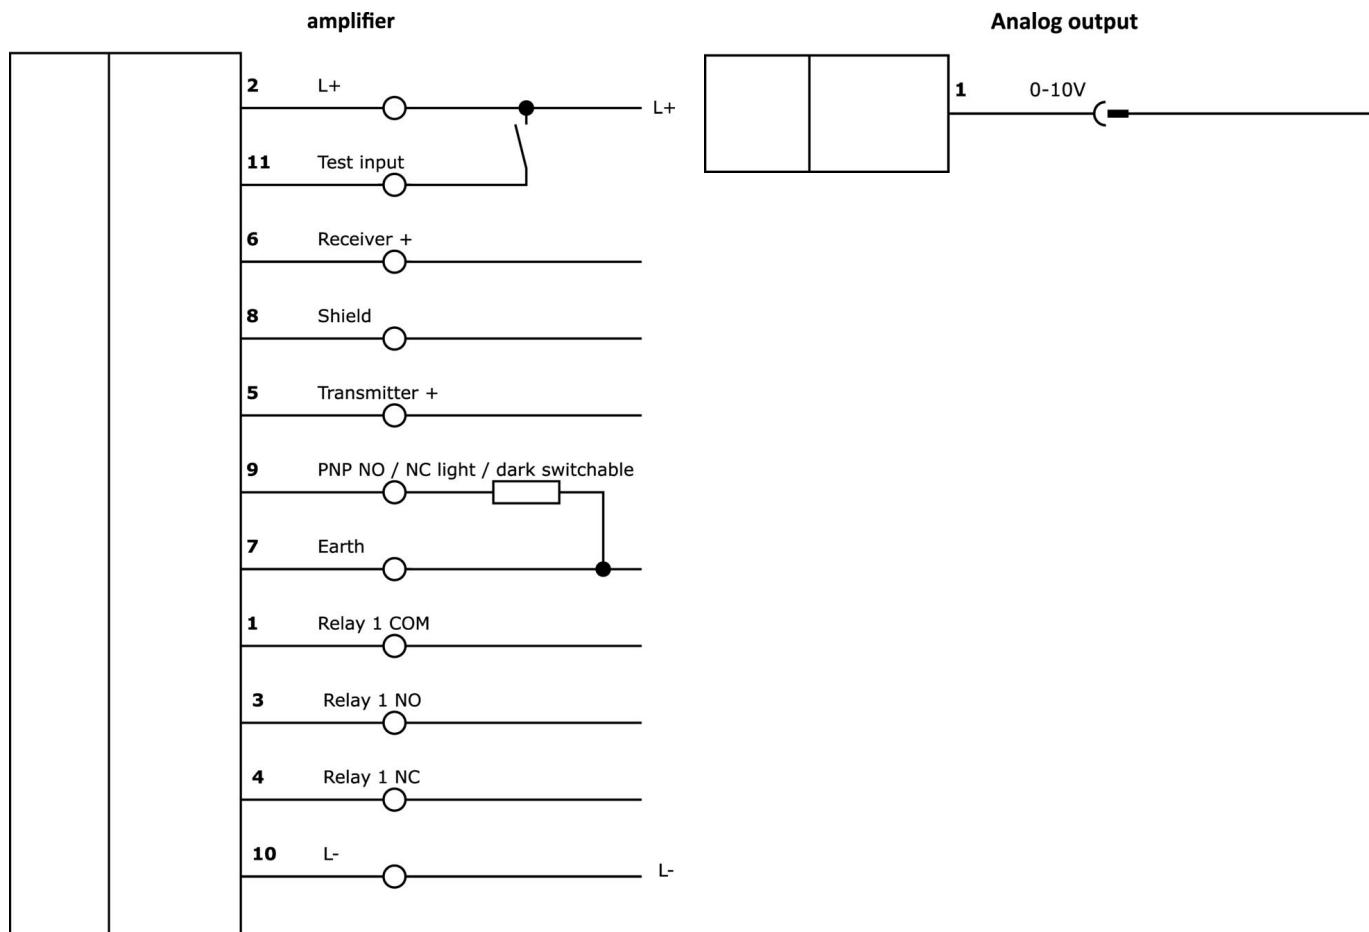
Design	Cuboid
Width	40mm
Height	76.5mm
Length	78.5mm
Mounting method	Relay base
Degree of protection (IP)	IP40
Housing material	Plastic
Ambient temperature	-25 - 50°C

**Classification**

ETIM 8	EC001485 Isolation amplifier
--------	------------------------------

**More**

IPF Product Group	101 high performance through-beam sensors and amplifiers
packaging dimensions	120 x 80 x 45 mm
gross weight	160 g
Customs tariff number	85365019
WEEE number	40951076
Reach-compliant	Yes
RoHS-compliant	Yes

**Connection****Installation**

Mounting / installation may only be carried out by a qualified electrician!

**Disposal****Safety warnings**

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website [www.ipf-electronic.com](http://www.ipf-electronic.com).