

OW500572

Optical sensors • Angular light barriers

sensor optical, angle, 75x10x75mm, fork width 60mm, 10-30V DC, 1x PNP/NPN NC/NO, IO-Link, Connector M8 3pin, IP67, Zinc die-cast+Glass, Red light, 5kHz pulsed, Manual adjustment



Special design of through-beam sensor. Transmitter and receiver are located in the fork or angular limbs and are perfectly aligned to each other.

Electrical features

Response/decay time	0.1ms
Number of switching outputs	1
Resolution	0.3mm
Type of the forked light barrier	Standard
Type of switching function	Normally closed contact/normally open contact
Type of electrical connection	Connector M8
Type of switching output	PNP/NPN
Rated switching current	100mA
Setting procedure	Manual adjustment
Short-circuit protection	Yes
No-load current	30mA
Number of pins	3
Repeatability +/-	20µm
Switching frequency	5000Hz
Protection class	III
Voltage drop	1V
Scanning function	Light-/dark-on mode
Reverse polarity protection	Yes
Decay time	0.1ms
Absolute repeat accuracy	0.02mm
Operating voltage (DC)	10 - 30V

Mechanical features

Design	Cuboid
Fork light barrier design	Angular shaped
Width	75mm
Fork width	60mm
Height	75mm
Length	10mm
Degree of protection (IP)	IP67
Active area material of sensor	glass
Housing material	Zinc die-cast
Ambient temperature	-25 - 60°C

Optical features

Light source	red light
Light beam form	Point
Min. object size	0.3mm
Light wavelength of the transmitter diode	660nm
Wavelength of the sensor	660nm
Pulsed light source	Yes

Other features

IO-Link version	V1.1
Feeding technology	Yes
Ambient temperature	-25 - 60°C


Classification

ETIM 8	EC002720 Fork light barrier
--------	-----------------------------

More

IPF Product Group	110 fork / angular light barriers
packaging dimensions	160 x 150 x 105 mm
gross weight	92 g
Customs tariff number	85365019
WEEE number	40951076
Reach-compliant	Yes
RoHS-compliant	Yes

Connection

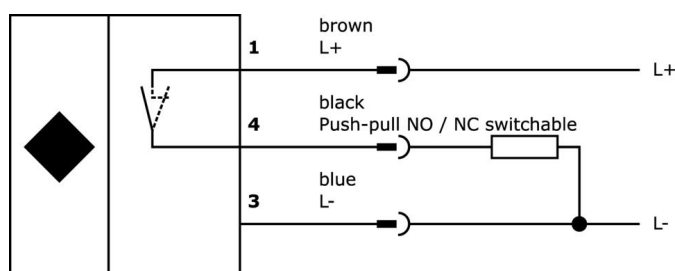

Installation



Mounting / installation may only be carried out by a qualified electrician!

Disposal



Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website www.ipf-electronic.com.

Any software, drivers or IODD files that may be required to operate your device can be downloaded free of charge from our homepage: www.ipf-electronic.com

Dimensional drawing

