

PG106571

Laser sensors • Forked light barrier

sensor laser, fork, 24x6x32mm, fork width 10mm, 12-30V DC, 1x PNP/NPN NC/NO, Connector M8 4pin, IP67, Aluminum+Glass, Infrared light, 25kHz



Special design of through-beam sensor. Transmitter and receiver are located in the fork or angular limbs and are perfectly aligned to each other.

Electrical features

Response/decay time	0.02ms
Number of switching outputs	1
Resolution	0.3mm
Type of the forked light barrier	Standard
Type of switching function	Normally closed contact/normally open contact
Type of electrical connection	Connector M8
Type of switching output	PNP/NPN
Rated switching current	100mA
Short-circuit protection	Yes
No-load current	20mA
Number of pins	4
Repeatability +/-	10µm
Switching frequency	25000Hz
Protection class	III
Scanning function	Light-/dark-on mode
Reverse polarity protection	Yes
Decay time	0.02ms
Absolute repeat accuracy	0.01mm
Operating voltage (DC)	12 - 30V

Mechanical features

Design	Cuboid
Fork light barrier design	Furcate
Aperture diameter	0.6mm
Width	31.5mm
Fork depth	13.5mm
Fork width	10mm
Height	24mm
Length	6mm
Degree of protection (IP)	IP67
Active area material of sensor	glass
Housing material	Aluminum
Ambient temperature	-20 - 50°C

Optical features

Laser class	Class 1
Light source	Infrared light
Light beam form	Point
Min. object size	0.01mm
Light wavelength of the transmitter diode	850nm
Wavelength of the sensor	850nm

Other features

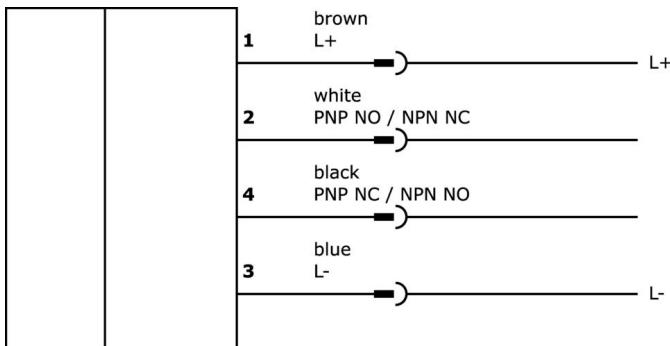
Feeding technology	Yes
Ambient temperature	-20 - 50°C

Classification

ETIM 8	EC002720 Fork light barrier
--------	-----------------------------

More

IPF Product Group	170 laser fork/angular light barriers
packaging dimensions	123 x 77 x 25 mm
gross weight	33 g
Customs tariff number	85365019
WEEE number	40951076
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

Connection**Installation**

Mounting / installation may only be carried out by a qualified electrician!

Disposal**Safety warnings**

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website www.ipf-electronic.com.

Dimensional drawing

