

PP200822

laser pointer • Cross

Laser pointer, 20round, 103long, cross, laser diode, green light, 520nm, 24V diagnostic coverage, M12 connector, IP67, stainless steel, focus 150-5000mm

- ✓ focusable
- ✓ aluminum housing
- ✓ M12 plug connection



green laser cross Laser protection class 2M

Electrical features

Type of electrical connection	Connector M12
Laser power	10mW
Operating voltage (DC)	21,6 - 26,4V

Mechanical features

Diameter	20mm
Storage temperature	-40 - 85°C
Length	103mm
Housing material	Stainless steel
Ambient temperature	-20 - 60°C

Optical features

Laser class	Class 2M
Light source	Laser diode, green light
Light beam form	Line
Wavelength of the sensor	520nm
focus	150 - 5000mm

Other features

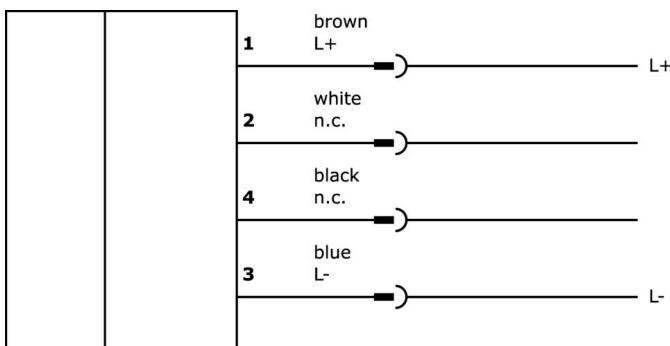
Ambient temperature	-20 - 60°C
---------------------	------------

Classification

ETIM 8

More

IPF Product Group	163 Laser (various)
packaging dimensions	160 x 99 x 60 mm
gross weight	195 g
Customs tariff number	90319000
WEEE number	40951076
Reach-compliant	Yes
RoHS-compliant	Yes

Connection**Installation**

Mounting / installation may only be carried out by a qualified electrician!

Disposal**Safety warnings**

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website www.ipf-electronic.com.

Dimensional drawing