

PP98E263

laser pointer • Cross

laser pointer, M18x1 108long, Cross (X), 15°, Laser diode, green light, 520nm, 9-30V DC, M12-connector, IP67, Brass Chrome-plated, 5mW, focus 100-10000mm

including 2x Nut



Electrical features

Type of electrical connection	Connector M12
Laser power	5mW
Temperature drift	±3 % Performance stability over the entire temperature range
Reverse polarity protection	Yes
Operating voltage (DC)	9 - 30V

Mechanical features

Diameter	20mm
Thread length	31mm
Thread pitch	1mm
Storage temperature	-40 - 80°C
Length	108mm
Surface	Chrome-plated
Degree of protection (IP)	IP67
Housing material	Aluminum
Thread dimension	M18
Ambient temperature	-10 - 50°C

Optical features

Laser class	Class 2M
Light source	Laser diode, green light
Light beam form	Cross (X)
Wavelength of the sensor	520nm
Angle of beam spread	15°
focus	100 - 10000mm

Other features

Temperature drift of wavelength	0.06nm/K
Ambient temperature	-10 - 50°C

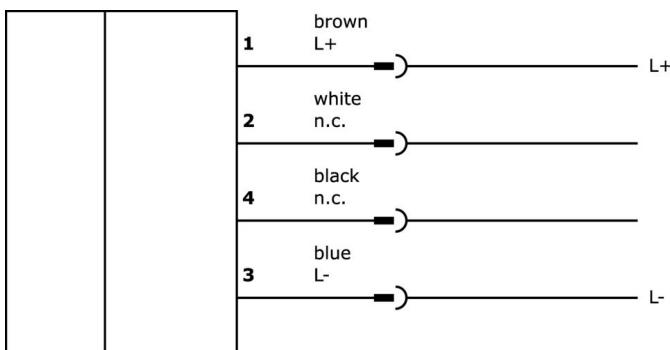
Classification

ETIM 8

EC000641 Measuring laser

More

IPF Product Group	163 Laser (various)
packaging dimensions	175 x 113 x 35 mm
gross weight	144 g
Customs tariff number	90319000
WEEE number	40951076
Reach-compliant	Yes
RoHS-compliant	Yes

Connection**Installation**

Mounting / installation may only be carried out by a qualified electrician!

Disposal**Safety warnings**

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website www.ipf-electronic.com.

Dimensional drawing