

PT080320

Laser sensors • Diffuse reflection sensors with background suppression

sensor laser, diffuse-reflection sensor, M8x1 50long, Sn: 20-150, 10-30V DC, 1x PNP+NPN NC/NO, Cable connector M12 4pin 0.3m PUR (Polyurethane), IP65, Stainless steel 1.4305+Acrylic glass, 0.025kHz, Laser diode, infrared light, Point, Teach-In

including 2x Nut



Optical sensors function contactlessly. They detect objects independent of their characteristics (e.g., shape, color, surface structure, material). The basic operating principle is based on the transmission and reception of light. There are three different versions: 1. The through-beam sensor consists of two separate devices, a transmitter and a receiver that are aligned with one another. If the light beam between the two devices is interrupted, the switching output integrated in the receiver changes its status. 2. With the retro-reflective sensor, the transmitter and receiver are located in one device. The emitted light beam is reflected back to the receiver by a reflector that is to be mounted opposite the device. As soon as the light beam is interrupted, the switching output integrated in the device changes its status. 3. With the diffuse reflection sensor, the transmitter and receiver are in one device. The emitted light beam is reflected by the object that is to be detected. As soon as the receiver detects the reflected light, the switching output integrated in the device changes its status.

Electrical features

Response/decay time	20ms
Number of switching outputs	1
Display	LED display
Type of switching function	Normally closed contact/normally open contact
Type of electrical connection	Cable connector M12
Type of switching output	PNP/NPN
Rated switching current	100mA
Setting procedure	Teach-In
Short-circuit protection	Yes
Number of pins	4
Switching distance	20 - 150mm
Switching frequency	25Hz
Voltage drop	2V
Scanning function	Light-/dark-on mode
Reverse polarity protection	Yes
Operating voltage (DC)	10 - 30V

Mechanical features

Number of cores	4
Design	Cylinder, screw-thread
Thread length	45mm
Thread pitch	1mm
Cable length	0.3m
Storage temperature	-10 - 60°C
Length	50mm
Degree of protection (IP)	IP65
Active area material of sensor	acrylic glass
Housing material	Stainless steel 1.4305
Material of cable sheath	Plastic (PUR)
Thread dimension	M8
Ambient temperature	-10 - 60°C

Optical features

Laser class	Class 1
Light source	Laser diode, infrared light
Light beam form	Point
Wavelength of the sensor	880nm

Other features

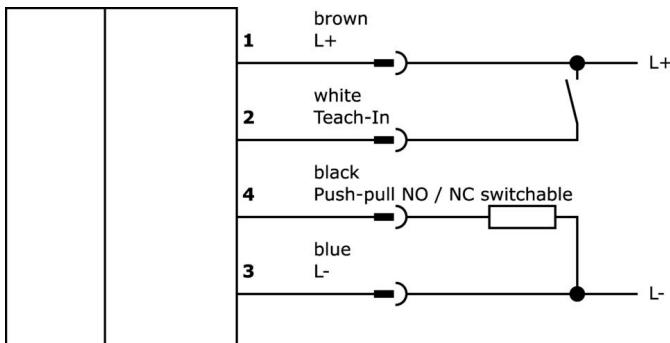
Operational mode	Background suppression
Reference medium / object	Material with 90% reflectivity
Ambient temperature	-10 - 60°C

Classification

ETIM 8	EC002719 Photoelectric proximity switch with background suppression
--------	---

More

IPF Product Group	160 laser sensor
packaging dimensions	123 x 77 x 25 mm
gross weight	49 g
Customs tariff number	85365019
WEEE number	40951076
Reach-compliant	Yes
RoHS-compliant	Yes

Connection**Installation**

Mounting / installation may only be carried out by a qualified electrician!

Disposal**Safety warnings**

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website www.ipf-electronic.com.

Dimensional drawing