

## UT180127

### Ultrasonic sensors • Pushbuttons

sensor ultrasonic, diffuse-reflection sensor, M18x1 90long, Sn: 100-600, 19-30V DC, 1x PNP NO (NO), Connector M12 5pin, IP67, Plastic, Manual adjustment, With LED display, ultrasonic cone Axial, Synchronization possible

including 2x Nut



Ultrasonic sensors are non-contact and wear-free position switches which can also be used under rough environmental conditions. A key advantage of these devices lies in the fact that the material and the surface characteristics of the objects to be detected can be almost anything. Solids, liquids, grainy materials and powdery materials can be identified without the shape or the color of the object having any influence to the measured result. In addition, the ability to detect transparent materials such as films and fluids is of particular importance. The shape and color of the objects do not influence the result of the detection. The capability to detect transparent films or liquids is also of special importance. Ultrasonic sensors are used for distance measurement (e.g. detection of diameters, loop control), for fill level detection (e.g. silo detection), for positioning and presence detection (e.g. glass pane positioning, film tear check, glass bottle detection)

#### Electrical features

Number of switching outputs	1
Display	LED display
Type of switching function	Normally open contact (NO)
Type of electrical connection	Connector M12
Type of switching output	PNP
Rated switching current	500mA
Setting procedure	Manual adjustment
Relative hysteresis	2.5%
Short-circuit protection	Yes
No-load current	35mA
Number of pins	5
Relative repeat accuracy	0.2%
Sound outlet	axial
Switching distance	100 - 600mm
Switching frequency	25Hz
Carrier frequency	300kHz
Reverse polarity protection	Yes
Operating voltage (DC)	19 - 30V
Input function	Synchronization

### Mechanical features

Design	Cylinder, screw-thread
Thread length	65mm
Thread pitch	1mm
Length	90mm
Degree of protection (IP)	IP67
Housing material	Plastic
Diameter detection	Yes
Thread dimension	M18
Ambient temperature	-15 - 70°C

### Optical features

Angle of beam spread	8°
----------------------	----

### Other features

Operating frequency	300kHz
Level detection	Yes
Object detection on conveyor systems	Yes
Ambient temperature	-15 - 70°C


### Classification

ETIM 8	EC001849 Ultrasonic probe
--------	---------------------------

### More

IPF Product Group	250 ultrasonic sensors
packaging dimensions	170 x 105 x 55 mm
gross weight	100 g
Customs tariff number	85365019
WEEE number	40951076
OzDS-compliant	Yes
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

### Connection

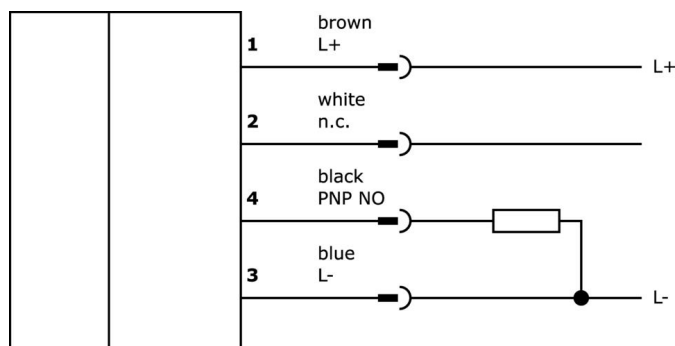

#### Installation



Mounting / installation may only be carried out by a qualified electrician!

#### Disposal



#### Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website [www.ipf-electronic.com](http://www.ipf-electronic.com).

#### Dimensional drawing

