

UT309023

Ultrasonic sensors • Distance measurement

sensor ultrasonic, diffuse-reflection sensor, M30x1.5 79long, Sn: 600-6000, 18-30V DC, 0-10V/4-20mA, IO-Link, Connector M12 4pin, IP67, Brass Nickel-plated, Teach-In, With LED display, ultrasonic cone Axial

including 2x Nut



Ultrasonic sensors are non-contact and wear-free position switches which can also be used under rough environmental conditions. A key advantage of these devices lies in the fact that the material and the surface characteristics of the objects to be detected can be almost anything. Solids, liquids, grainy materials and powdery materials can be identified without the shape or the color of the object having any influence to the measured result. In addition, the ability to detect transparent materials such as films and fluids is of particular importance. The shape and color of the objects do not influence the result of the detection. The capability to detect transparent films or liquids is also of special importance. Ultrasonic sensors are used for distance measurement (e.g. detection of diameters, loop control), for fill level detection (e.g. silo detection), for positioning and presence detection (e.g. glass pane positioning, film tear check, glass bottle detection)

Electrical features

Display	LED display
Resolution	1mm
Type of analog output	0 - 10V 4 - 20mA
Type of electrical connection	Connector M12
Rated switching current	100mA
Readiness delay	300ms
Setting procedure	Teach-In
Short-circuit protection	Yes
Load resistance (voltage output)	10kOhm
Load resistance (current output)	0.4kOhm
No-load current	45mA
Number of pins	4
Relative linearity deviation	0.5%
Sound outlet	axial
Switching frequency	2Hz
Protection class	III
Temperature drift over entire measuring range	0.2%
Carrier frequency	80kHz
Reverse polarity protection	Yes
Absolute repeat accuracy	4mm
Operating voltage (DC)	18 - 30V
Measuring range	600 - 6000mm
Multiplex connection (switchover by means of IO-Link)	Yes
Switching output (switchover by means of IO-Link)	Yes
Synchronization connection (switchover by means of IO-Link)	Yes
Teach input (switchover by means of IO-Link)	Yes

Mechanical features

Design	Cylinder, screw-thread
Diameter	45.5mm
Thread length	33.5mm
Thread pitch	1.5mm
Length	79mm
Mounting distance	1400mm
Surface	nickel-plated
Degree of protection (IP)	IP67
Housing material	Brass
Diameter detection	Yes
Thread dimension	M30
Ambient temperature	-25 - 70°C

Other features

Operating frequency	80kHz
Level detection	Yes
Object detection on conveyor systems	Yes
Reference medium / object	Measuring plate 200x200mm
Ambient temperature	-25 - 70°C


Classification

ETIM 8	EC001849 Ultrasonic probe
--------	---------------------------

More

IPF Product Group	259 ultrasonic sensors (analog)
packaging dimensions	155 x 175 x 48 mm
gross weight	188 g
Customs tariff number	85365019
WEEE number	40951076
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

Connection

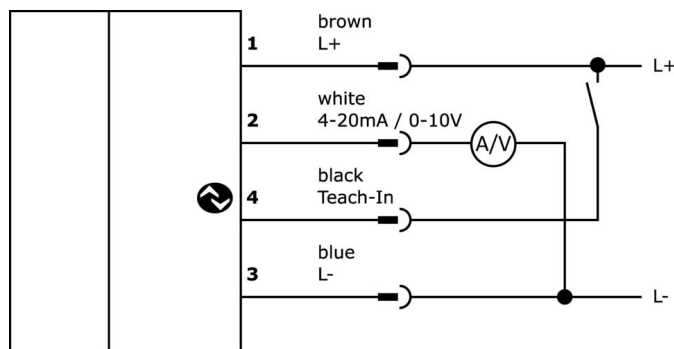

Installation



Mounting / installation may only be carried out by a qualified electrician!

Disposal



Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website www.ipf-electronic.com.

Any software, drivers or IODD files that may be required to operate your device can be downloaded free of charge from our homepage: www.ipf-electronic.com

Dimensional drawing