


dimensions M30 x 1.5mm

switching distance flush 10mm

- ✓ robust stainless-steel housing
- ✓ active surface made of Vectra®
- ✓ 2m silicone cable
- ✓ M12-connector



**sensor applicable up to +230°C
amplifier integrated in the connector**




Technical Data

IB30012T

nominal switching distance	10mm
mounting	flush
operating voltage	10 ... 30V DC
current consumption (w/o load)	≤ 5mA
voltage decay (max. load)	≤ 2V
switching output	NO
output current	≤ 100mA
switching frequency	≤ 9Hz
hysteresis	≤ 15%
display (signal)	LED yellow
short-circuit protection	+
reverse polarity protection	+
temperature (operating), sensor	0 ... +230 °C
temperature (operating), connector	-20 ... +70 °C
material (housing)	stainless steel 1.4305
material (front cap)	Vectra®
protection class (EN 60529)	IP 50
connection	5m Teflon cable, M12-connector
connection accessories	e.g. VK200025
mounting accessories	e.g. AY000101

connection

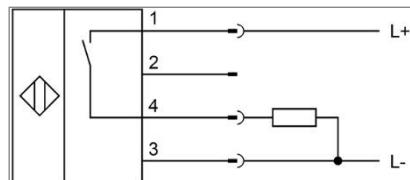


wire colors:

1 = BN(brown), 2 = WH (white),
 3 = BU (blue), 4 = BK (black)

functions:

1 = L+, 2 = n. c., 3 = L-, 4 = PNP NO

dimensional drawing

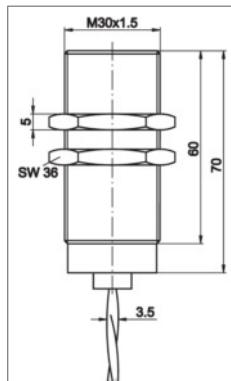

The output stage is integrated in the M12-connector. To guarantee proper functioning of the device, the cable between Lemo-socket and M12-connector may in no case be cut!

The max. ambient temperature of the M12-connector is 70°C.

 article-no: **IB30012T**

Warning: Never use these articles in applications where the safety of a person depends on their functionality.

