

inductive sensor

PRODUCT: cuboid devices: Ms
flush


DESIGN: 12x8x59




- housing: solid brass, nickel-plated
- status display by LED
- M12-connector 3-pole
- integrated amplifier
- short circuit and reverse polarity protection
- delivery in storage box

Technical Data

operating voltage	10 to 30V DC
current consumption	< 20mA
voltage drop (max. load)	< 1,5V
current carrying capacity	200mA
nominal sensing range Sn	2,5mm
hysteresis	5% to 15% of Sn
system of protection	IP54 to EN 60529
ambient temperature	0°C to +50°C
display	LED
connection	about 27cm cable with M12-connector 3-pole

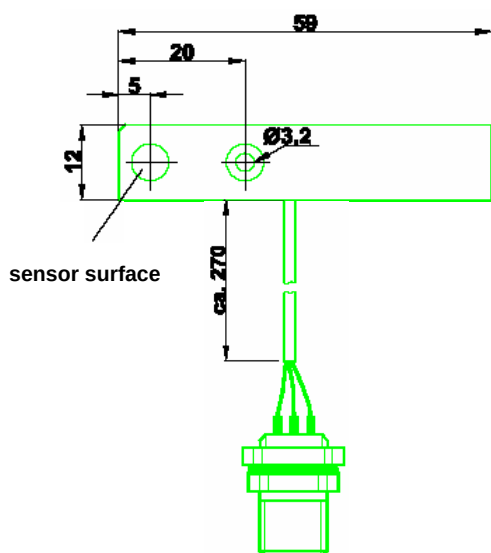

Connection connector

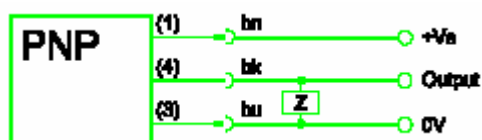

wire colours: bn = brown (1), bu = blue (3), bk = black (4)

article number: IB991281