

## MZ07C200

### Magnetic field sensors • Sensors for T-slot

Sensor Magnetic, cylinder, 6.2mm T-slot, 6.5x27x5mm, 10-30V DC, -25-130°C, 1x PNP NO, M8 cable connector 3-pin 0.6m PTFE, IP67, aluminum, 2.8mT, installation from above, position of sensor surface in middle of device



For many tasks in the field of automation technology, it is necessary to recognize the motional processes in pneumatic and hydraulic cylinders and to detect the position of the piston with precision. For this, magnetic cylinder sensors are used.

#### Electrical features

Number of switching outputs	1
Type of switching function	Normally open contact (NO)
Type of electrical connection	Cable connector M8
Type of switching output	PNP
Rated switching current	100 mA
Absolute hysteresis	1 mm
Short-circuit protection	Yes
No-load current	10 mA
Magnetic sensitivity	2.8 mT
Number of pins	3
Switching frequency	1000 Hz
Sensor surface (active)	Middle area
Voltage drop	2 V
Reverse polarity protection	Yes
Absolute repeat accuracy	0.1 mm
Operating voltage (DC)	10 - 30 V

**Mechanical features**

Number of cores	3
Design	Cuboid
Width	5 mm
Height	6.5 mm
Cable length	0.6 m
Sensor surface position	Center of the device
Length	27 mm
Mounting access, cylinder groove	From the top
Degree of protection (IP)	IP67
Housing material	Aluminum
Material of cable sheath	Plastic (PTFE)
Strong vibration / motion	Yes
Ambient temperature	-25 - 130 °C
Ambient temperature of the connector	-25 - 70 °C

**Other features**

Suitable for	6.2mm T-slot
Cylinder version	With T-groove
Harsh environmental conditions	Yes
Oil and cooling lubricants	Yes

**Classification**


ETIM 8	EC002544 Magnetic proximity switch
--------	------------------------------------

**More**


IPF Product Group	222 pneumatic cylinder sensors (high temperature)
packaging dimensions	120 x 100 x 17 mm
gross weight	20 g
Customs tariff number	85365019
WEEE number	40951076
Reach-compliant	Yes
RoHS-compliant	Yes

**Important notes**

**!** The output electronics are located in the connector. Do not disconnect the connector!

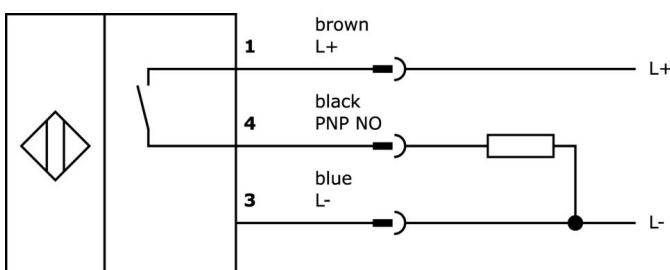**Connection**

## Dimensional drawing

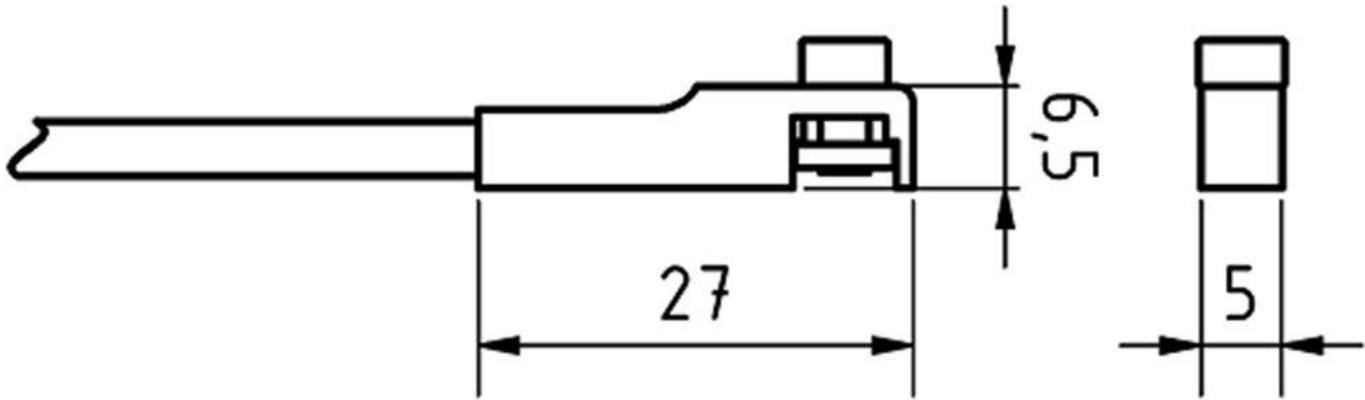

## Extract accessories program

## AM98A882



accessories magnetic, For sensor MZ07, for Cylinder, Bosch profiled barrel, Screw mounting

## NG530002



DC power supply, single-phase, 99x114x22mm, 24V, 0.1A, Number of relay outputs 2, 100-264V AC 50Hz, 100-264V AC 60Hz, Screw connection, IP20, Plastic, Stabilized, Output voltage, pulsed

## AY000154



Tool, Screwdriver set, Internal hexagon 0.7mm, Internal hexagon 0.9mm, Internal hexagon 1.3mm, Internal hexagon 1.5mm, Internal hexagon 2mm, Slot 1.5mm, Slot 2mm, Slot 2.5mm, Chromium steel

## AY000141



Plastic sheath, Ø17mm, Inner diameter 10mm, -40-250°C, Glass fiber with silicone rubber, Short-term resistance to weld spatter 1200°C, Tensile strength 400N, Flexible, Flame retardant, yard good

## AM98E153



accessories magnetic, Installation tape, 259x9.5mm, Span 35-68mm, For sensor MZ07, Stainless steel

## VY000004



DC power supply, sensor tester, 120x26x72mm, 18V, 0.04A, Spring clamp connection 4pin, IP20, Plastic

## AM000076



accessories magnetic, clamp, 4x6, 2x6,2mm, aluminum

## AM000070



accessories magnetic, Mounting clip, 12x30x25mm, span 3.9-6.6mm, Metal, For sensor MZ07, for Cylinder pull-rod, Screw mounting

## AM000071



accessories magnetic, Mounting clip, 16x30x30mm, span 6.1-8.5mm, Aluminum, For sensor MZ07, for Cylinder pull-rod, Screw mounting

You can find further accessories on our homepage



## Installation

Mounting / installation may only be carried out by a qualified electrician!



## Disposal

WEEE number according to § 6 para. 3  
ElektroG: 40951076

## Safety warnings

**!** Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

**!** Never use these devices in applications where the safety of a person depends on their functionality.