

MZR4C093

Magnetic field sensors • Sensors for C-slot

sensor magnetic, cylinder, 3.75mm rounded groove, Ø3,6mm 20long, 10-30V DC, 1x PNP NO, Cable connector M12 3pin 0.3m PUR (Polyurethane), IP67, Stainless steel 1.4305, LED, 6mT, mounting Lateral, Sensor surface position Border area of the device



For many tasks in the field of automation technology, it is necessary to recognize the motional processes in pneumatic and hydraulic cylinders and to detect the position of the piston with precision. For this, magnetic cylinder sensors are used.

Electrical features

Number of switching outputs	1
Display	LED display
Type of switching function	Normally open contact (NO)
Type of electrical connection	Cable connector M12
Type of switching output	PNP
Rated switching current	150 mA
Absolute hysteresis	1 mm
Short-circuit protection	Yes
No-load current	10 mA
Magnetic sensitivity	6 mT
Number of pins	3
Switching frequency	1000 Hz
Sensor surface (active)	Border area / edge area
Voltage drop	2 V
Reverse polarity protection	Yes
Absolute repeat accuracy	0.1 mm
Operating voltage (DC)	10 - 30 V

Mechanical features

Design	Cylinder plain
Diameter	3.6 mm
Cable length	0.3 m
Sensor surface position	Device edge area below the light emitting diode
Length	20.5 mm
Mounting access, cylinder groove	Lateral
Degree of protection (IP)	IP67
Housing material	Stainless steel 1.4305
Material of cable sheath	Plastic (PUR)
Strong vibration / motion	Yes
Ambient temperature	-25 - 70 °C

Other features

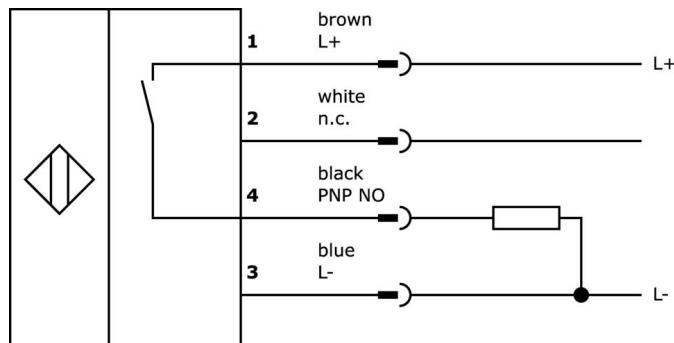
Suitable for	3.5mm C-slot (round groove)
Cylinder manufacturer	Festo
Harsh environmental conditions	Yes
Oil and cooling lubricants	Yes

Classification

ETIM 8	EC002544 Magnetic proximity switch
--------	------------------------------------

More

IPF Product Group	223 pneumatic cylinder sensors (diverse)
packaging dimensions	120 x 100 x 17 mm
gross weight	20 g
Customs tariff number	85365019
WEEE number	40951076
Reach-compliant	Yes
RoHS-compliant	Yes

Connection

Extract accessories program**AY000154**

Tool, Screwdriver set, Internal hexagon 0.7mm, Internal hexagon 0.9mm, Internal hexagon 1.3mm, Internal hexagon 1.5mm, Internal hexagon 2mm, Slot 1.5mm, Slot 2mm, Slot 2.5mm, Chromium steel

VK003020

Cable socket, angular, self-assembly, screw connection, Ø3-6.5mm, 4A, 240V, -25-90°C, M12 socket 4-pin, IP67, PBT

VK003024

Cable socket, Straight, Suitable for self-assembly, Screw connection, Ø3-6.5mm, 4A, 240V, -25-90°C, M12 Female (socket) 4pin, IP67, PBT

AM000081

accessories magnetic, Adapter, 5x20x4,6mm, Aluminum

AM000111

accessories magnetic, Clamp, Ø3, 6mm 6long, Metal

VK030F62

Connection cable, 0.3m, M12 socket 3-pin angular, M8 connector 3-pin straight, 3x0. 34mm², PUR (polyurethane), IP67, LED, suitable for trailing chain and torsion resistant, oils and cooling lubricants, welding area, silicone-free

VK060F62

Connection cable, 0.6m, M12 socket 3-pin angular, M8 connector 3-pin straight, 3x0. 34mm², PUR (polyurethane), IP67, LED, suitable for trailing chain and torsion resistant, oils and cooling lubricants, welding area, silicone-free

AV000141

accessories cable socket, Mounting clip, 13.5mm, PPO, Packaging unit 5, Accessories for Cable socket/connector M12

VY000004

DC power supply, sensor tester, 120x26x72mm, 18V, 0.04A, Spring clamp connection 4pin, IP20, Plastic

You can find further accessories on our homepage

**Installation**

Mounting / installation may only be carried out by a qualified electrician!

**Disposal**

WEEE number according to § 6 para. 3 ElektroG: 40951076

Safety warnings

I Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

I Never use these devices in applications where the safety of a person depends on their functionality.