

OI991170

Temperature sensors • contactless measurement (infrared)

sensor optical, infrared, M38x1.5, 0-300°C, 10°, 4-20mA, Connector M12 4pin, IP65, V4A

including Nut



Electrical features

Response/decay time	100 ms
Display	LED display
Type of analog output	4 - 20mA
Type of electrical connection	Connector M12
Rated switching current	50 mA
Short-circuit protection	Yes
No-load current	40 mA
Measuring range, temperature	0 - 300 °C
Number of pins	4
Relative repeat accuracy	1 %
Reverse polarity protection	Yes
Supported communication interface	Optional
Operating voltage (DC)	18 - 32 V
Data logging possible	Yes

Mechanical features

Thread length	100 mm
Thread pitch	1.5 mm
Length	155 mm
Degree of protection (IP)	IP65
Housing material	Stainless steel 1.4571
Thread dimension	M38
Ambient temperature	-10 - 60 °C

Optical features

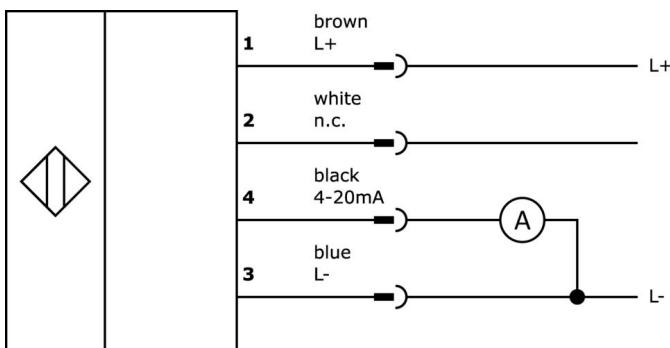
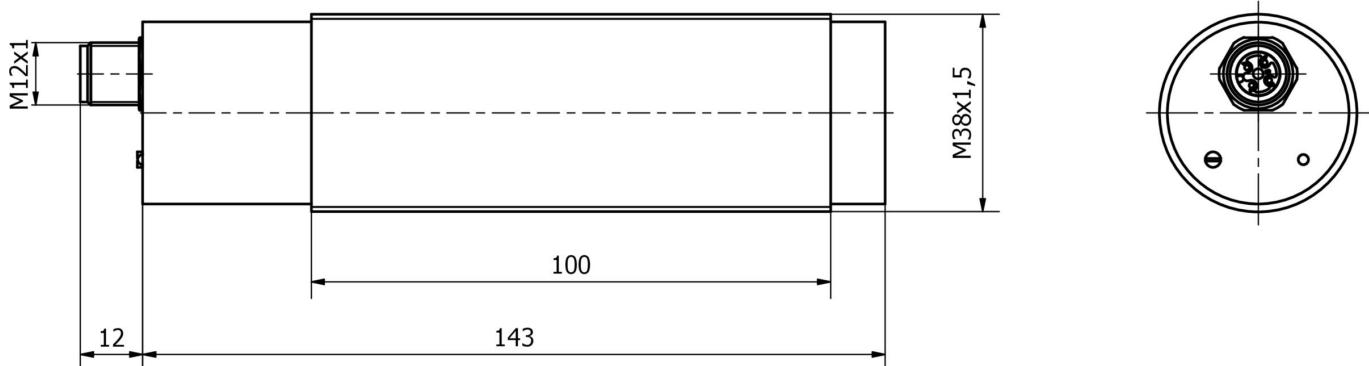
Angle of beam spread	10 °
----------------------	------

Classification

ETIM 8	EC000601 Measuring device for temperature and climate
--------	---

More

IPF Product Group	310 temperature sensors
packaging dimensions	210 x 138 x 95 mm
gross weight	700 g
Customs tariff number	90251900
WEEE number	40951076
Reach-compliant	Yes
RoHS-compliant	Yes

Connection**Dimensional drawing**

Extract accessories program

VK003021

Cable socket, Angular, Suitable for self-assembly, Screw connection, Ø3-6.5mm, 4A, 60V, -25-90°C, M12 Female (socket) 5pin, IP67, PBT

VK003025

Cable socket, Straight, Suitable for self-assembly, Screw connection, Ø3-6.5mm, 4A, 60V, -25-90°C, M12 Female (socket) 5pin, IP67, PBT

VK003020

Cable socket, angular, self-assembly, screw connection, Ø3-6.5mm, 4A, 240V, -25-90°C, M12 socket 4-pin, IP67, PBT

VK003024

Cable socket, Straight, Suitable for self-assembly, Screw connection, Ø3-6.5mm, 4A, 240V, -25-90°C, M12 Female (socket) 4pin, IP67, PBT

VK200021

Connection cable, 2m, M12 Female (socket) 3pin Angular, Free conductor end, 3x0.34mm², PUR (Polyurethane), Ø4.3mm, 250V, -30-90°C, IP67, Suitable for trailing chain and torsion resistant, Oil and cooling lubricants, Welding area, Silicone-free

VK200025

Connection cable, 2m, M12 Female (socket) 3pin Straight, Free conductor end, 3x0.34mm², PUR (Polyurethane), Ø4.3mm, 250V, -30-90°C, IP67, Suitable for trailing chain and torsion resistant, Oil and cooling lubricants, Welding area, Silicone-free

VK000041

Adaption, M12 Female (socket) 4pin Straight, M8 Male (connector) 4pin Straight, 24V, -25-85°C, IP67, Oil and cooling lubricants, Welding area

VK000037

Adaption, M12 Female (socket) 3pin Straight, M8 Male (connector) 3pin Straight, 24V, -25-85°C, IP67, Oil and cooling lubricants, Welding area

You can find further accessories on our homepage

**Installation**

Mounting / installation may only be carried out by a qualified electrician!

**Disposal**

WEEE number according to § 6 para. 3
ElektroG: 40951076

Safety warnings

I Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

I Never use these devices in applications where the safety of a person depends on their functionality.