

## SL270120

### Flow sensors • Sensors for air

sensor flow, Air, Calorimetric, 27x112x67mm, G1/4 inch, 24V DC, PNP NO (NO), Plug-in connection M12 4pin, PBT, Pressure resistance 20bar, Manual adjustment

including Sealing ring, Screwdriver



The function of the flow sensor is based on the calorimetric principle. The probe is heated up from the inside a few degrees Celsius in relation to the flow medium, in which it protrudes. When the medium flows, the heat generated in the probe is dissipated through the medium. The temperature within the sensor is measured and compared with the likewise measured medium temperature. From the obtained temperature difference the flow state of each medium can be derived. These sensors are applied in areas such as monitoring of cooling systems, ventilation systems, pump dry running by checking the presence of liquid or gas flows.

#### Electrical features

Response/decay time	20000 ms
Display	LED display
Type of switching function	Normally open contact (NO)
Type of electrical connection	Connector M12
Type of switching output	PNP
Rated switching current	200 mA
Readiness delay	30 ms
Setting procedure	Manual adjustment
Short-circuit protection	Yes
No-load current	50 mA
Number of pins	4
Residual ripple	10 %
Voltage drop	2 V
Reverse polarity protection	Yes
Measurement principle	calorimetric
Operating voltage (DC)	24 V

**Mechanical features**

Type of process connection	G1/4 inch
Design	Cuboid
Width	67 mm
Pressure resistance	20 bar
Height	27 mm
Length	112 mm
Medium temperature	0 - 80 °C
Degree of protection (IP)	IP67
Housing material	PBT
Sensing element material	Stainless steel 1.4571
Measuring range flow velocity	,5 - 40 m/s
Ambient temperature	0 - 60 °C
Measuring range Flow velocity in air	0,5 - 40 m/s

**Other features**

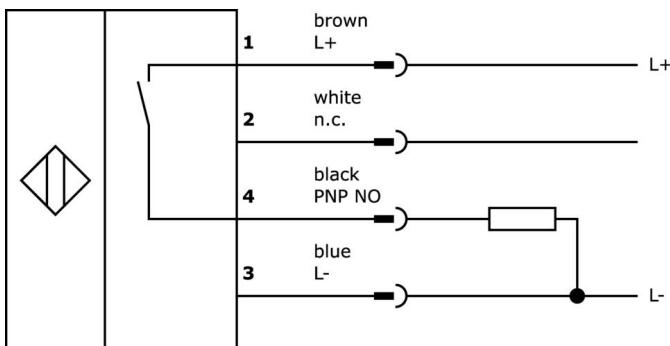
Suitable for	Gases
Reference medium / object	Air
ardTE00_Anwendungen	Pneumatik-Anwendungen

**Classification**

ETIM 8	EC002580 Flow monitoring device
--------	---------------------------------

**More**

IPF Product Group	300 flow sensors
packaging dimensions	160 x 99 x 60 mm
gross weight	290 g
Customs tariff number	90268020
WEEE number	40951076
Reach-compliant	Yes
RoHS-compliant	Yes

**Connection**

## Extract accessories program

**VK003020**

Cable socket, angular, self-assembly, screw connection, Ø3.6-5mm, 4A, 240V, -25-90°C, M12 socket 4-pin, IP67, PBT

**VK003024**

Cable socket, Straight, Suitable for self-assembly, Screw connection, Ø3.6-5mm, 4A, 240V, -25-90°C, M12 Female (socket) 4pin, IP67, PBT

**VK200221**

Connection cable, 2m, M12 Female (socket) 3pin Angular, Free conductor end, 3x0.34mm<sup>2</sup>, PUR (Polyurethane), Ø4.3mm, -30-90°C, IP67, With LED display, Suitable for trailing chain and torsion resistant, Oil and cooling lubricants, Welding area, Silic...

**VK200225**

Connection cable, 2m, M12 Female (socket) 3pin Straight, Free conductor end, 3x0.34mm<sup>2</sup>, PUR (Polyurethane), Ø4.3mm, -30-90°C, IP67, With LED display, Suitable for trailing chain and torsion resistant, Oil and cooling lubricants, Welding area, Sili...

**VK200021**

Connection cable, 2m, M12 Female (socket) 3pin Angular, Free conductor end, 3x0.34mm<sup>2</sup>, PUR (Polyurethane), Ø4.3mm, 250V, -30-90°C, IP67, Suitable for trailing chain and torsion resistant, Oil and cooling lubricants, Welding area, Silicone-free

**VK200025**

Connection cable, 2m, M12 Female (socket) 3pin Straight, Free conductor end, 3x0.34mm<sup>2</sup>, PUR (Polyurethane), Ø4.3mm, 250V, -30-90°C, IP67, Suitable for trailing chain and torsion resistant, Oil and cooling lubricants, Welding area, Silicone-free

You can find further accessories on our homepage

**Installation**

Mounting / installation may only be carried out by a qualified electrician!

**Disposal**

WEEE number according to § 6 para. 3  
ElektroG: 40951076

**Safety warnings**

**I** Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

**I** Never use these devices in applications where the safety of a person depends on their functionality.