

HRT 96

Diffuse reflection light scanner with background suppression

en 01-2013/05 50123117



100 ... 1800 mm
100 ... 2000 mm



- Scanner with adjustable background suppression in infrared light
- Robust metal housing with glass cover or plastic housing, protection class IP 67 for industrial application
- Complementary outputs for standard applications and a wide range of input and output variants for optimum adaptation to the application
- Connection via M12 connector or terminal compartment
- Various options with switching delays, light/dark switching, activation input, and optics heating combined with low temperature




Accessories:

(available separately)


- Mounting systems (BT 96, BT 96.1, UMS 96, BT 450.1-96)
- M12 connectors (KD ...)
- Ready-made cables (K-D ...)

Dimensioned drawing




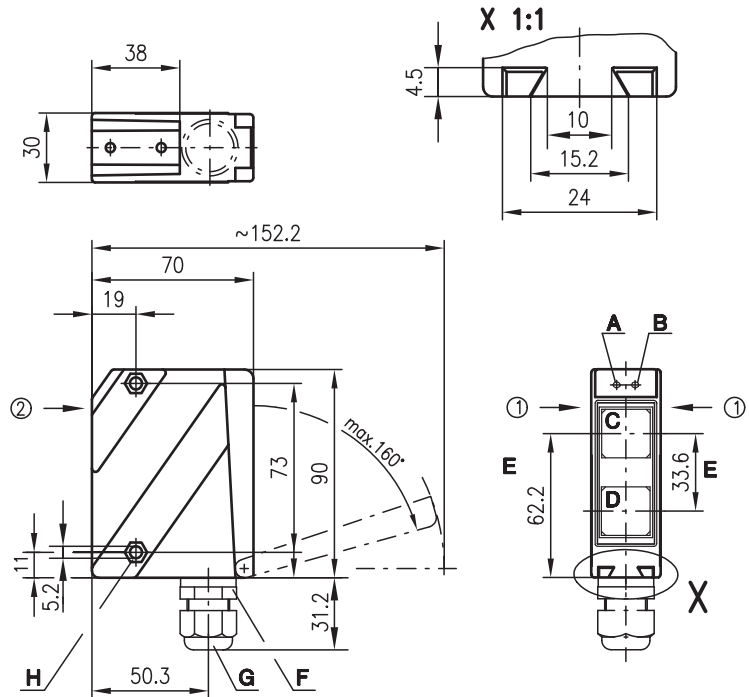


- A** Green indicator diode
B Yellow indicator diode
C Transmitter
D Receiver
E Optical axis
F Device plug M12x1
G Screwed cable gland M16x1.5 for Ø 5 ... 10mm
H Countersinking for SK nut M5, 4.2 deep
I Connection terminals
K Cable entry
L Scanning range adjustment

Preferred entry direction for objects ① + ②



Electrical connection



Specifications

Optical data

Typ. scanning range limit (white 90 %) ¹⁾
 Scanning range ²⁾
 Adjustment range
 Light source
 Wavelength

Timing

Switching frequency
 Response time
 Delay before start-up

Electrical data

Operating voltage U_B
 Residual ripple
 Open-circuit current
 Switching output
 Function
 Signal voltage high/low
 Output current

Indicators

Green LED
 Yellow LED

Mechanical data

Housing
 Optics cover
 Weight
 Connection type

Environmental data

Ambient temp. (operation/storage)
 Protective circuit ³⁾
 VDE safety class ⁴⁾
 Protection class
 Light source
 Standards applied

Options

Switching delay (slow oper./release)

Activation input activ (high)

Transmitter active/not active

Activation/disable delay

Switching delay (slow oper./release)

Optics heating

Low temperature design

Infrared light

100 ... 1800mm
 see tables
 150 ... 1200mm
 LED (modulated light)
 880nm

300Hz

1.67ms

≤ 200ms

10 ... 30VDC (incl. residual ripple)

≤ 15% of U_B

≤ 35mA

PNP transistor
 light or dark switching

≥ ($U_B - 2V$) / ≤ 2V

max. 100mA

ready

reflection

Plastic housing

polycarbonate
 plastic
 150g
 terminals or M12 connector

Infrared light

100 ... 2000mm
 see tables
 150 ... 1800mm
 LED (modulated light)
 880nm

Metal housing

diecast zinc
 glass
 380g

Tables

Infrared light 100 ... 1200mm

1	100	1200	1800
2	100	1100	1600
3	100	1000	1350

Infrared light 100 ... 1800mm


1	100	1800	2000
2	100	1700	1850
3	100	1500	1600

1	white 90%
2	gray 18%
3	black 6%



Scanning range [mm]
 Typ. scanning range limit [mm]

Diagrams


Infrared light 100 ... 1200mm




Infrared light 100 ... 1800mm



Infrared light 100 ... 1200mm



Infrared light 100 ... 1800mm



A white 90%
 B gray 18%
 C black 6%

Remarks

Approved purpose

This product may only be used by qualified personnel and must only be used for the approved purpose. This sensor is not a safety sensor and is not to be used for the protection of persons.

- With the set scanning range, a tolerance of the upper scanning range limit is possible depending on the reflection properties of the material surface.
- The diffuse reflection light scanner is also available with integrated AS-i chip for direct connection to the AS-i system.
- Available as a set together with cable socket.

HRT 96

Diffuse reflection light scanner with background suppression

Order guide

Selection table		Order code →							
Equipment ↓		HRT 96K/P-1600-1200-21 Part no. 50025135	HRT 96K/P-1600-1200-41 Part no. 50025133	HRT 96K/P-1607-1200-49 Part no. 50103090	HRT 96K/P-1600.1-1200-41 Part no. 50103217	HRT 96K/P-1600-1800-41 Part no. 50105667	HRT 96M/P-1620-1800-41 Part no. 50113909		
Light source	Infrared light (1200 mm)	●	●	●	●				
	Infrared light (1800 mm)					●	●		
Connection	Terminals	●							
	M12 connector		●	●	●	●	●		
Housing	Plastic	●	●	●	●	●			
	Metal						●		
Features	Switching delay								
	Activation input								
	PIN 2 = NC (for direct connection to AS-i I/O coupling modules)			●	●				
	PIN 4 = dark switching								
	PIN 4 = light switching			●					
	PIN 4 = light/dark reversible				●				
	Optics heating/low temperature design						●		
	UL approval	●	●	●	●	●	●		

