

PRKL 8




en 2020/12/14 50137595

0 ... 14m

- Laser, red light, laser class 1
- The autocollimation principle used ensures that the device functions reliably over the entire range (0 ... max.)
- A²LS - Active Ambient Light Suppression
- Adjustable focus
- M12 turning connector

Dimensioned drawing

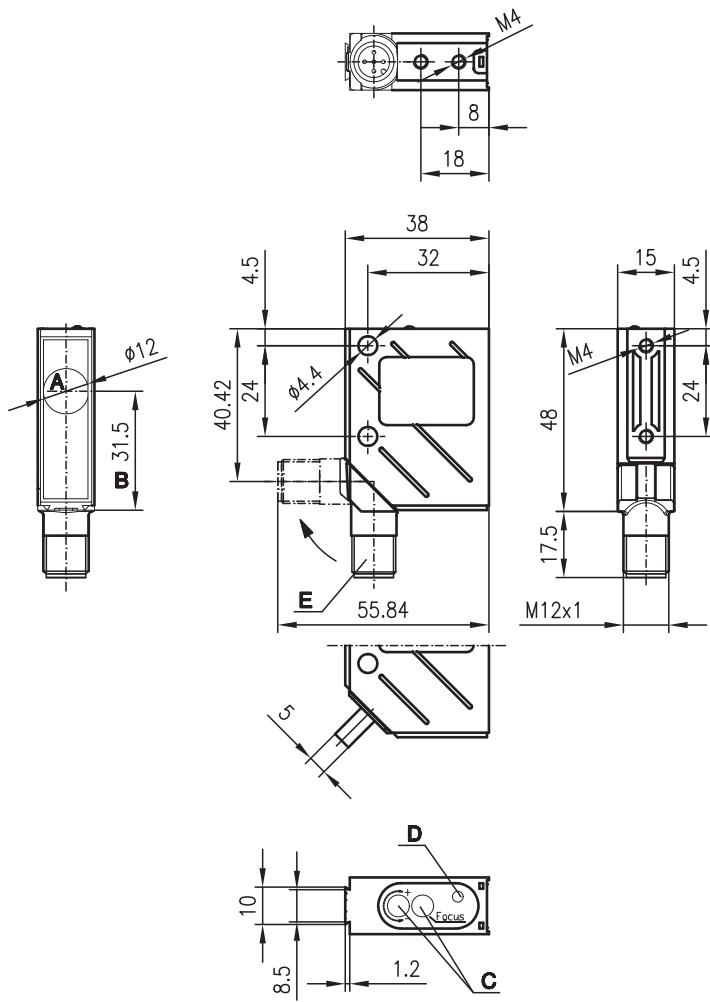

A Transmitter and receiver
B Optical axis
C Operational control
D Yellow LED
E Turning connector, turnable 90°


Accessories:

(available separately)

- M12 connectors (KD ...)
- Ready-made cables (KD ...)
- Mounting systems
- Reflectors
- Reflective tapes
- Control guard

Electrical connection

PRKL 8/24.99-S12

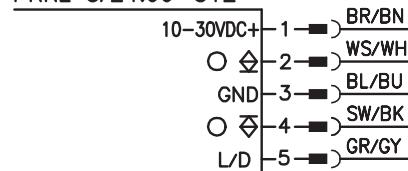

Technical data

Optical data

Typ. operating range limit (MTK(S) 50x50) ¹⁾	0 ... 12m
Operating range ²⁾	See tables
Light spot diameter	≥ 0.1 mm adjustable with 16 rotations (see diagram)
Focus adjustment range	140mm ... ∞ (see diagrams)
Beam divergence	≥ 0.5 mrad
Light source	Laser, pulsed
Laser class	1 acc. to IEC 60825-1:2014
Wavelength	655 nm (visible red light)
Max. output power (peak)	1.4 mW
Impulse duration	6μs

Time behavior

Switching frequency	2800Hz
Response time	0.18ms
Readiness delay	≤ 100ms

Electrical data

Operating voltage U_B	10 ... 30VDC
Residual ripple	≤ 15% of U_B
Open-circuit current	≤ 35mA
Switching output.../24...	1 PNP and 1 NPN transistor output, light switching
Function .../24...	Light/dark switching via pin 5
Signal voltage high/low	≥ $(U_B-2V)/2V$
Output current	Max. 100mA
Sensitivity	Adjustable with 12-turn potentiometer

Indicators

Yellow LED	Light path free
Yellow LED, flashing	Light path free, no function reserve

Mechanical data

Housing	Metal
Optics cover	Glass
Weight	70g
Connection type	M12 connector, 5-pin

Environmental data

Ambient temp. (operation/storage)	-10°C ... +40°C/-40°C ... +70°C
Protective circuit ³⁾	2, 3
VDE protection class ⁴⁾	II, all-insulated
Degree of protection ⁵⁾	IP 67, IP 69K ⁶⁾
Standards applied	IEC 60947-5-2

Additional functions

L/D input	$U_B/0V$ or not connected
Dark/light switching	< 0.5ms

- 1) Typ. operating range limit: max. attainable range without function reserve, focus = 16m
- 2) Operating range: recommended range with function reserve, focus = 16 m
- 3) 2=polarity reversal protection, 3=short circuit protection for all outputs
- 4) Rating voltage 250VAC
- 5) In end position of the turning connector (turning connector engaged)
- 6) IP 69K test acc. to DIN 40050 part 9 simulated, high pressure cleaning conditions without the use of additives, acids and bases are not part of the test

Tables

Laser class 1:

Reflectors	Operating range
1 TK(S)	100x100
2 MTK(S)	50x50
3 TK(S)	30x50
4 TK(S)	20x40
5 REF 6-S-	20x40
6 Film 6	50x50

1	0	12	14
2	0	10	12
3	0	4	5
4	0	4	5
5	0	5	6
6	0	5	6

Operating range [m] *

Typ. operating range limit [m] *


* for focus adjusted to 16m (right limit stop)

TK ... = adhesive

TKS ... = screw type

Film 2 = adhesive

Diagrams

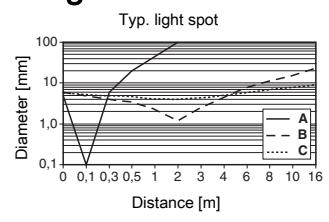

A Focus adjusted to 0.144 m (left limit stop)
 B Focus adjusted to 2 m
 C Focus adjusted to 16 m (right limit stop)

Notes

Observe intended use!

- ↳ This product is not a safety sensor and is not intended as personnel protection.
- ↳ The product may only be put into operation by competent persons.
- ↳ Only use the product in accordance with its intended use.

- Use reflectors with small triple structure – MTK(S), REF 6-S... or film 6

Order guide

	Designation	Part no.
Laser class 1		
With M12 connector	PRKL 8/24.99-S12	50115689

Laser safety notices

⚠ ATTENTION, LASER RADIATION – CLASS 1 LASER PRODUCT

The device satisfies the requirements of IEC 60825-1:2014 (EN 60825-1:2014) safety regulations for a product of laser class 1 as well as the U.S. 21 CFR 1040.10 regulations with deviations corresponding to "Laser Notice No. 56" from May 8, 2019.

- ↳ Observe the applicable statutory and local laser protection regulations.
- ↳ The device must not be tampered with and must not be changed in any way.
There are no user-serviceable parts inside the device.
- ↳ Repairs must only be performed by Leuze electronic GmbH + Co. KG.