

Part no.: 68000130

MLC500T14-3000

[illegible]


- [illegible]



[illegible]

[illegible][illegible]


Calculation of the effective protective field height $H_{\text{PEF}} = H_{\text{PFN}} + B + C$

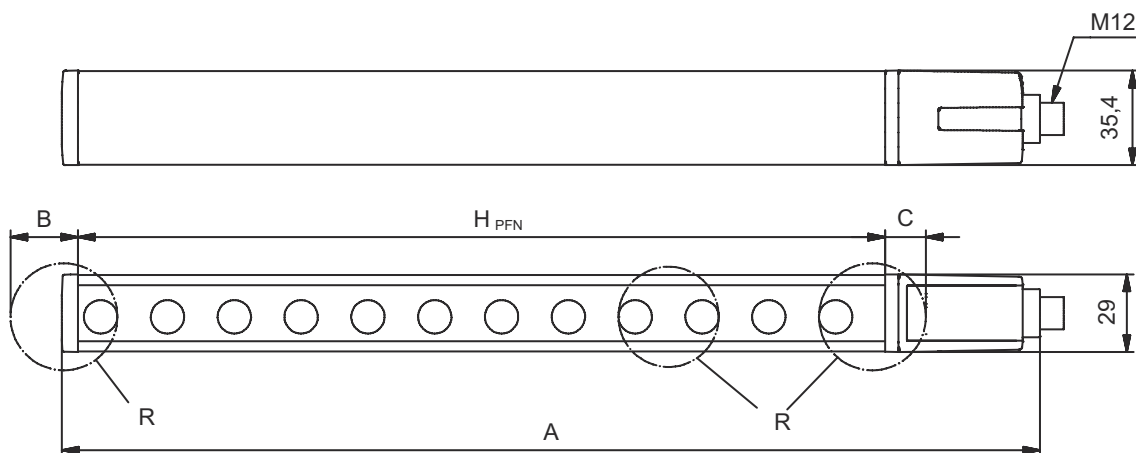

H_{PFF} Effective protective field height = 3012 mm


[illegible][illegible][illegible][illegible][illegible]

Electrical connection


[illegible][illegible][illegible]

Circuit diagrams

Transmission channel C1, reduced range

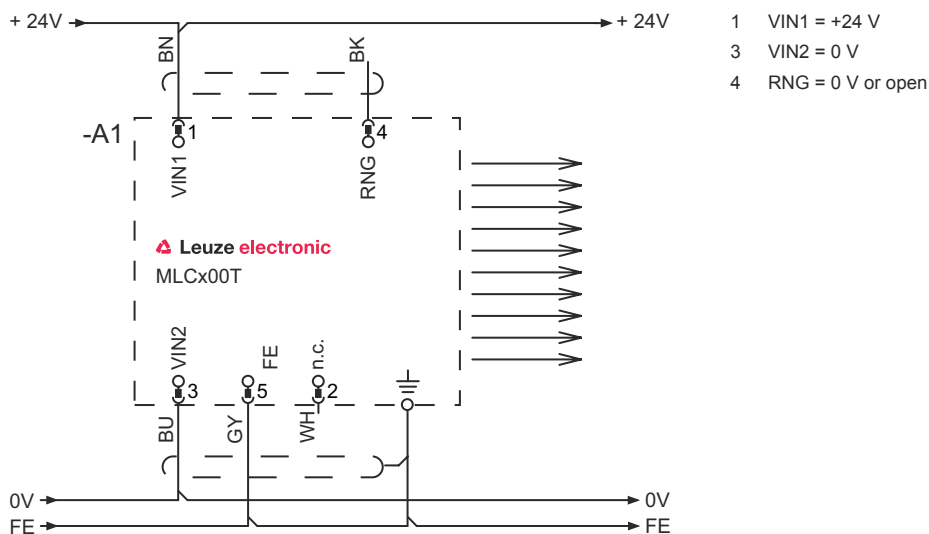

Transmission channel C1, standard range

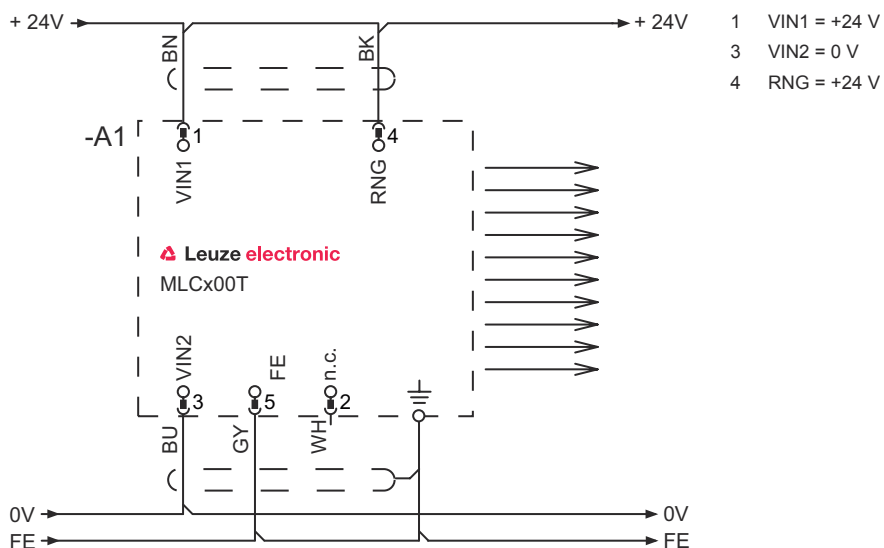

Suitable receivers

Part no.	Designation	Article	Description
68001130	MLC510R14-3000	Safety light curtain receiver	Function package: Basic Resolution: 14 mm Protective field height: 3,000 mm Response time: 64 ms Connection: Connector, M12, Metal, 5 -pin
68002130	MLC520R14-3000	Safety light curtain receiver	Function package: Standard Resolution: 14 mm Protective field height: 3,000 mm Response time: 64 ms Connection: Connector, M12, Metal, 8 -pin
68003130	MLC530R14-3000	Safety light curtain receiver	Function package: Extended Resolution: 14 mm Protective field height: 3,000 mm Response time: 64 ms Connection: Connector, M12, Metal, 8 -pin

Part number code

Part designation: MLCxyy-za-hhhh-ei-ooo

MLC	Safety light curtain
x	Series 3: MLC 300 5: MLC 500
yy	Function classes 00: transmitter 01: transmitter (AIDA) 02: transmitter with test input 10: basic receiver - automatic restart 11: basic receiver - automatic restart (AIDA) 20: standard receiver - EDM/RES selectable 30: Extended receiver blanking/muting or gating 35: Extended receiver – Gating
z	Device type T: transmitter R: receiver
a	Resolution 14: 14 mm 20: 20 mm 30: 30 mm 40: 40 mm 90: 90 mm
hhhh	Protective field height 150 ... 3000: from 150 mm to 3000 mm
e	Host/Guest (optional) H: Host MG: Middle Guest G: Guest
i	Interface (optional) /A: AS-i

[illegible]

Note	
	↗ A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.